


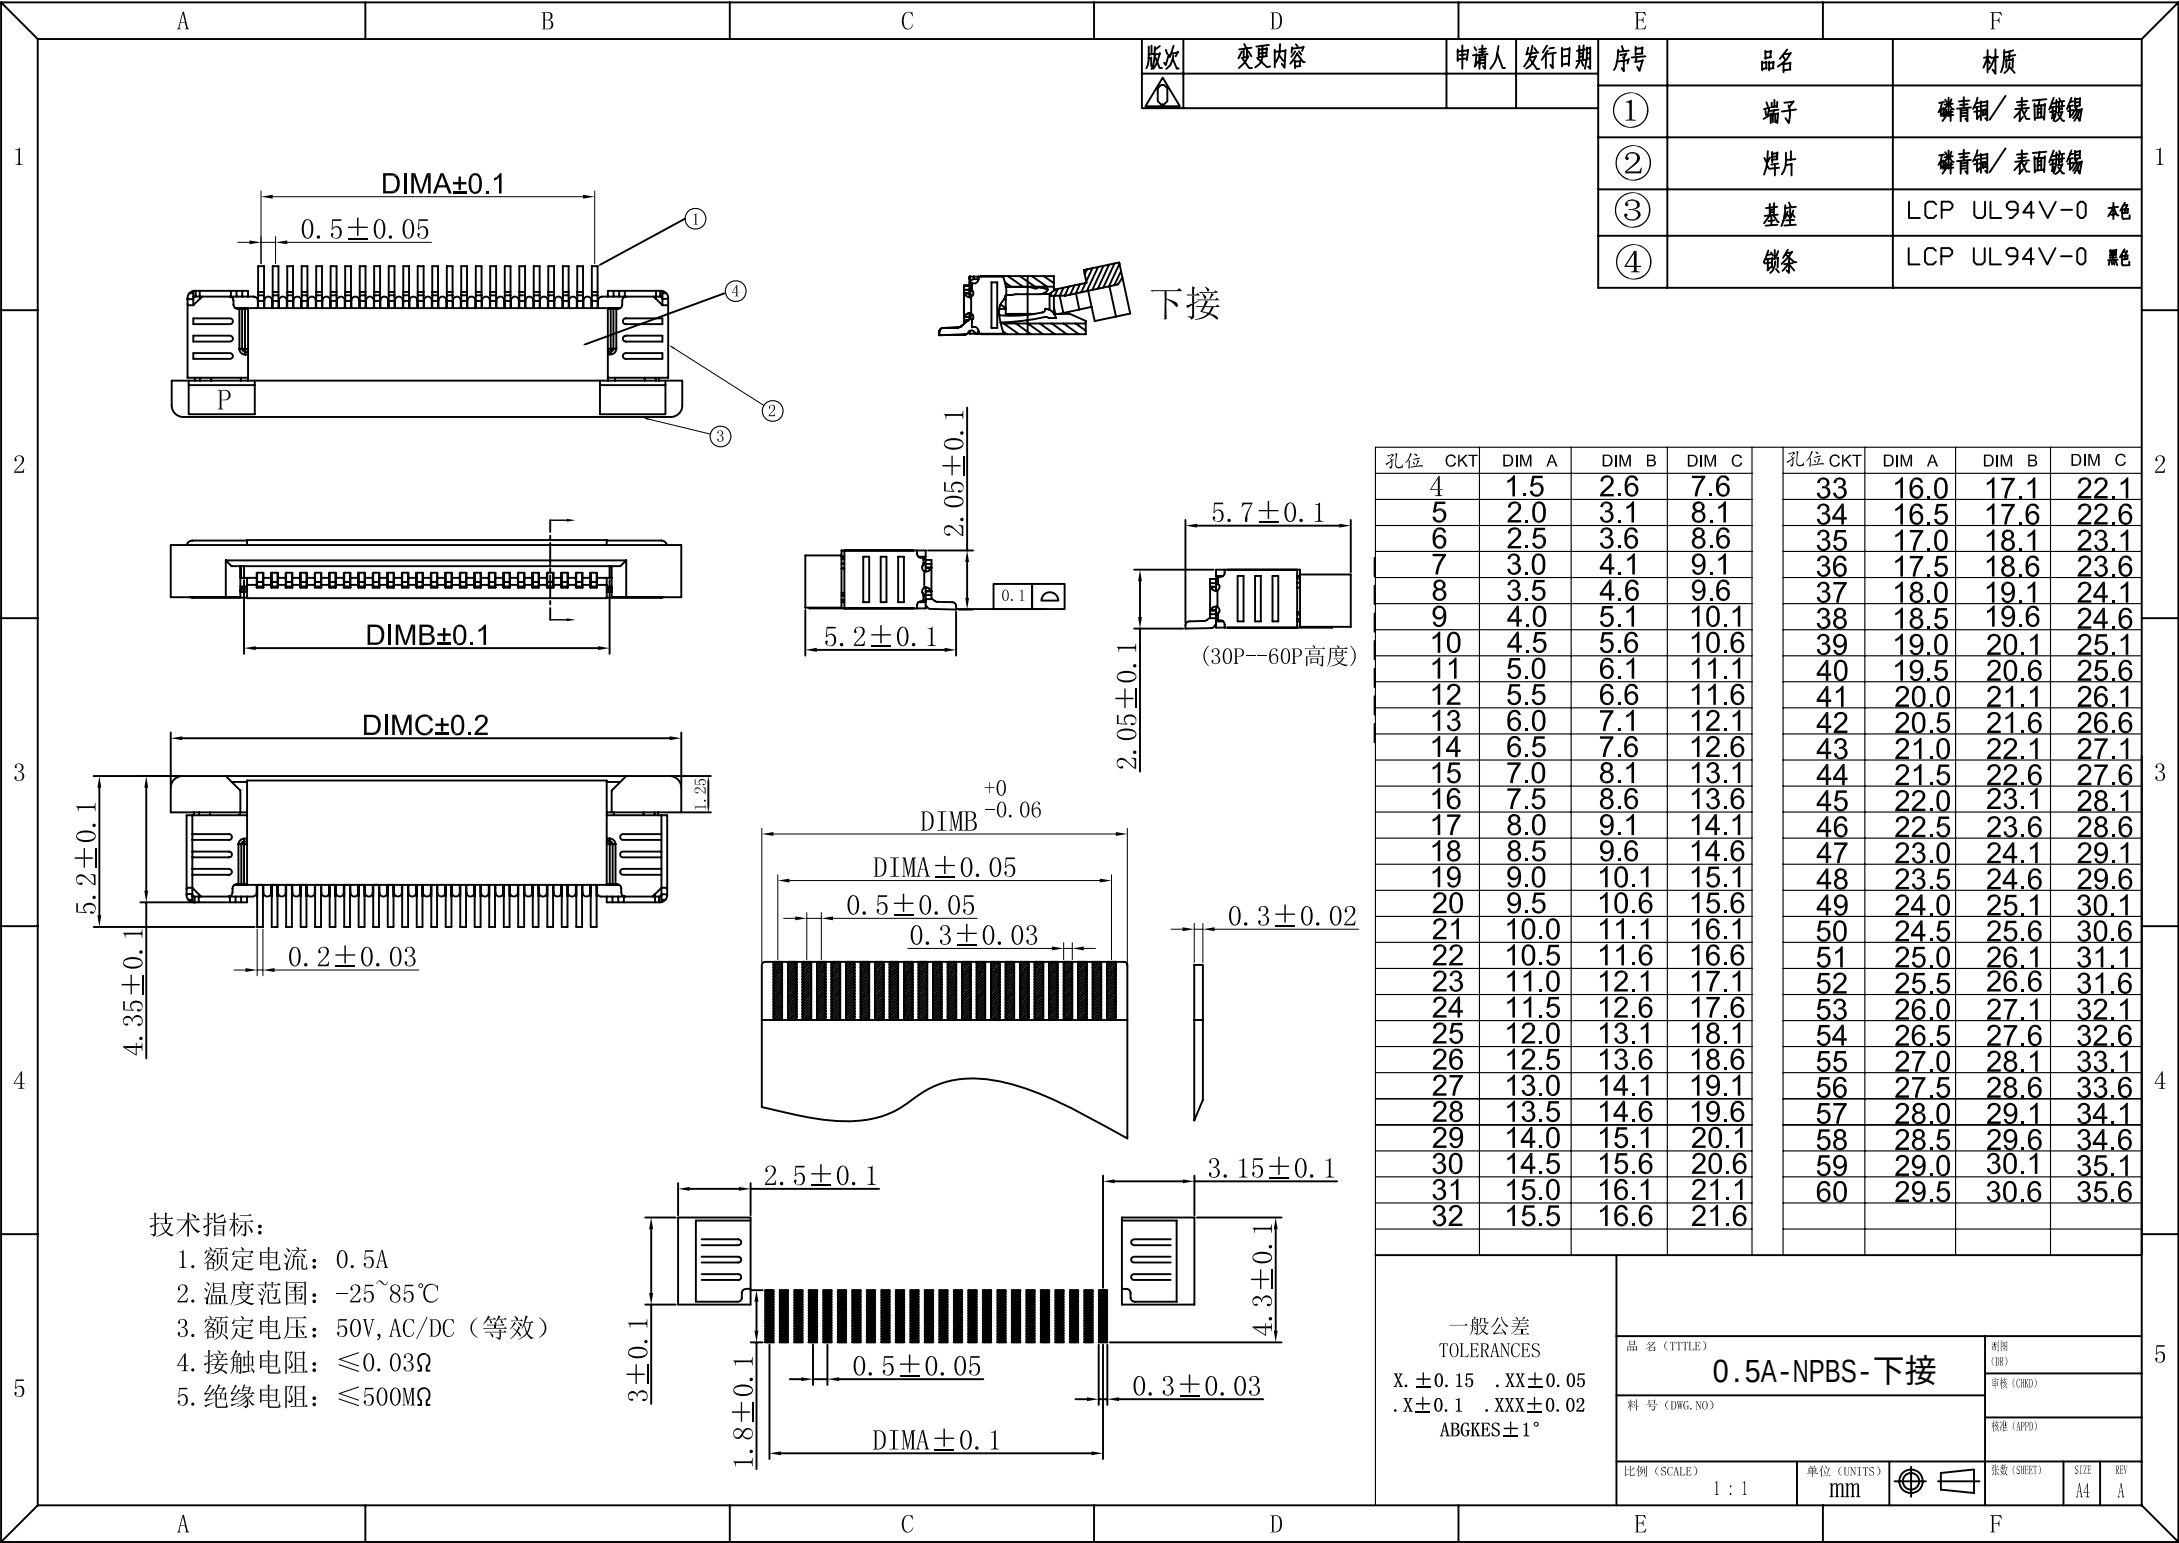

版次	变更内容	申请人	发行日期	序号	品名	材质
△				①	端子	磷青铜/表面镀锡
				②	焊片	磷青铜/表面镀锡
				③	基座	LCP UL94V-0 本色
				④	锁条	LCP UL94V-0 黑色

孔位	CKT	DIM A	DIM B	DIM C	孔位	CKT	DIM A	DIM B	DIM C
4	1.5	2.6	7.6	33	16.0	17.1	22.1		
5	2.0	3.1	8.1	34	16.5	17.6	22.6		
6	2.5	3.6	8.6	35	17.0	18.1	23.1		
7	3.0	4.1	9.1	36	17.5	18.6	23.6		
8	3.5	4.6	9.6	37	18.0	19.1	24.1		
9	4.0	5.1	10.1	38	18.5	19.6	24.6		
10	4.5	5.6	10.6	39	19.0	20.1	25.1		
11	5.0	6.1	11.1	40	19.5	20.6	25.6		
12	5.5	6.6	11.6	41	20.0	21.1	26.1		
13	6.0	7.1	12.1	42	20.5	21.6	26.6		
14	6.5	7.6	12.6	43	21.0	22.1	27.1		
15	7.0	8.1	13.1	44	21.5	22.6	27.6		
16	7.5	8.6	13.6	45	22.0	23.1	28.1		
17	8.0	9.1	14.1	46	22.5	23.6	28.6		
18	8.5	9.6	14.6	47	23.0	24.1	29.1		
19	9.0	10.1	15.1	48	23.5	24.6	29.6		
20	9.5	10.6	15.6	49	24.0	25.1	30.1		
21	10.0	11.1	16.1	50	24.5	25.6	30.6		
22	10.5	11.6	16.6	51	25.0	26.1	31.1		
23	11.0	12.1	17.1	52	25.5	26.6	31.6		
24	11.5	12.6	17.6	53	26.0	27.1	32.1		
25	12.0	13.1	18.1	54	26.5	27.6	32.6		
26	12.5	13.6	18.6	55	27.0	28.1	33.1		
27	13.0	14.1	19.1	56	27.5	28.6	33.6		
28	13.5	14.6	19.6	57	28.0	29.1	34.1		
29	14.0	15.1	20.1	58	28.5	29.6	34.6		
30	14.5	15.6	20.6	59	29.0	30.1	35.1		
31	15.0	16.1	21.1	60	29.5	30.6	35.6		
32	15.5	16.6	21.6						

- 技术指标:
- 1. 额定电流: 0.5A
 - 2. 温度范围: -25~85℃
 - 3. 额定电压: 50V, AC/DC (等效)
 - 4. 接触电阻: ≤0.03Ω
 - 5. 绝缘电阻: ≤500MΩ

一般公差 TOLERANCES X. ±0.15 .XX±0.05 .X±0.1 .XXX±0.02 ABGKES±1°		品名 (TITLE) 0.5A-NPBS-下接		制图 (DWG)	
		料号 (DWG.NO)		审核 (CHKD)	
				批准 (APPD)	
		比例 (SCALE) 1:1		张数 (SHEET)	
单位 (UNITS) mm		图例 (SYMBOL)		SIZE A4	REV A