

HSF RoHS

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0 颜色: 黑色
Housing: PA6T+30%G.F UL94V-0, Color: Black

端子 磷铜

Contact :Phosphor bronze

2. 特性 (characteristics):

额定电流 1 AMP

Rating Current:1 AMP.

接触电阻 20 mΩ MAX.

Contact Resistance:20 mΩ MAX.

绝缘电阻 1000 MΩ min.



Insulating Resistance:1000 MΩ min.

耐电压 AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40℃ to +105℃

Temperature Range: -40℃ to +105℃

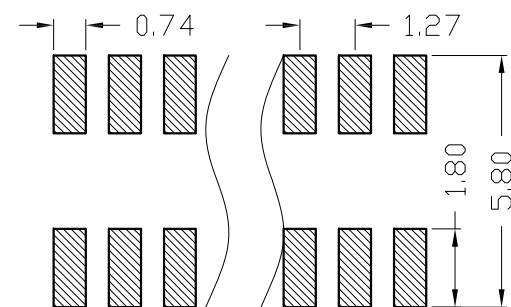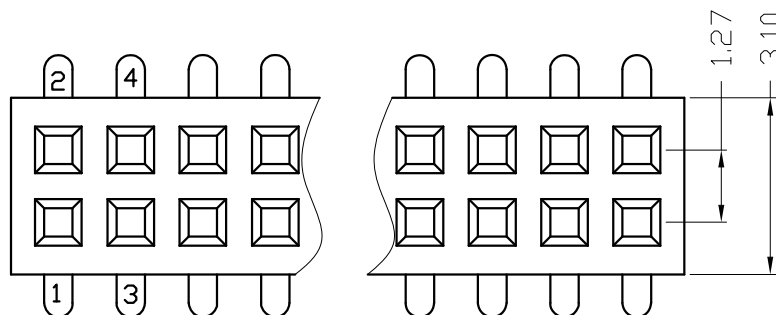

Recommended P.C.B layout

Ordering Information



1F43M- 21 XX XX X U X 1 Δ

Num of pins
Per row
2 to 50

Contact plating
G - gold flash
G1=1u" gold
G4=3u" gold
G5=5u" gold
G6=10u" gold
G7=15u" gold
G9=30u" gold
F - gold flash
F1=1U gold/tin
F4=3U gold/tin
F5=5U gold/tin
F6=10U gold/tin
F7=15U gold/tin
F9=30U gold/tin
SN= tin
SM= matt tin

Insulator
Material
P: PA6T
C: PA8T
D: LCP

Packing
A: PE pef
P: Tape & reel + CAP
C: Tube
D: Tube + CAP
E: Tray
F: Tape & reel

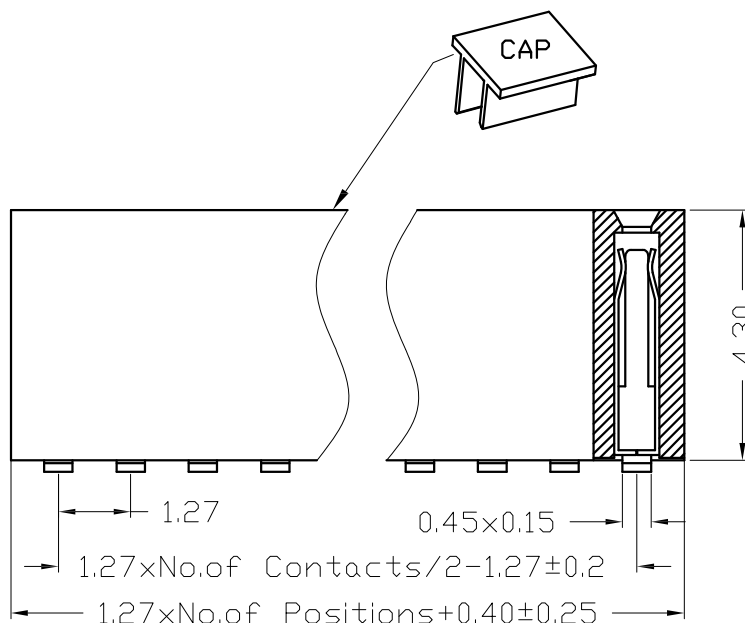

					OPERATION		DRAW	LIANR	20/06/09	SCALE		Fit		
					X.X	±0.40	DESIGN			UNIT		MM		
A1	20/06/09	Improve numbering instructions (完善编号备注说明)		张涛	X.XX	±0.25				SIZE	A4	DESIGN	PART NO.	
A0	12/05/18	NEW			X.XXX	±0.15	CHECK			SHEET	1/1	CHECK	TITLE:	117-B
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE			PROJ.		APPROVE	Customer No.	