
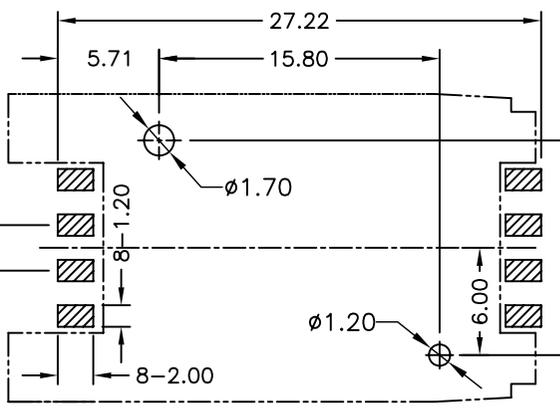
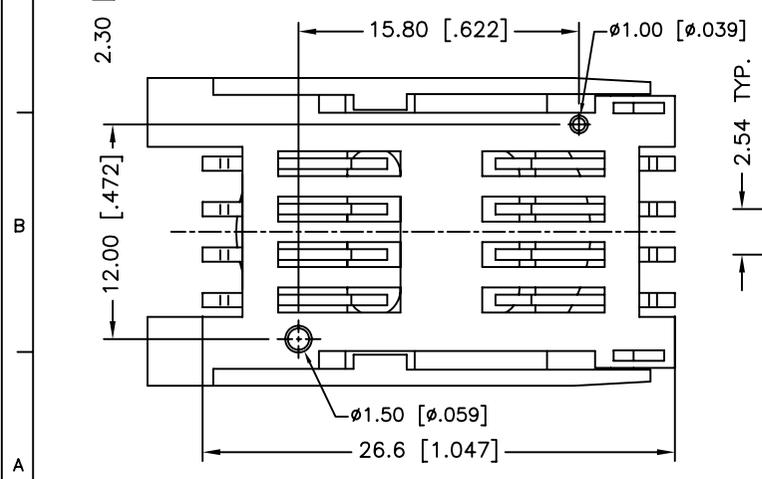
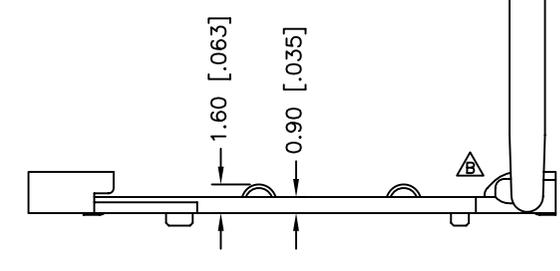
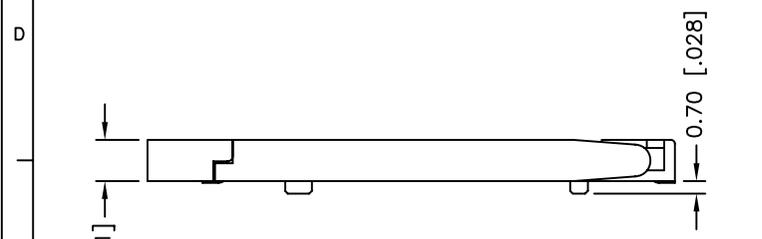


REV.	DESCRIPTION	DATE
A	RELEASE	Jul 18,2006
B	06'1233	Dec 29,2006

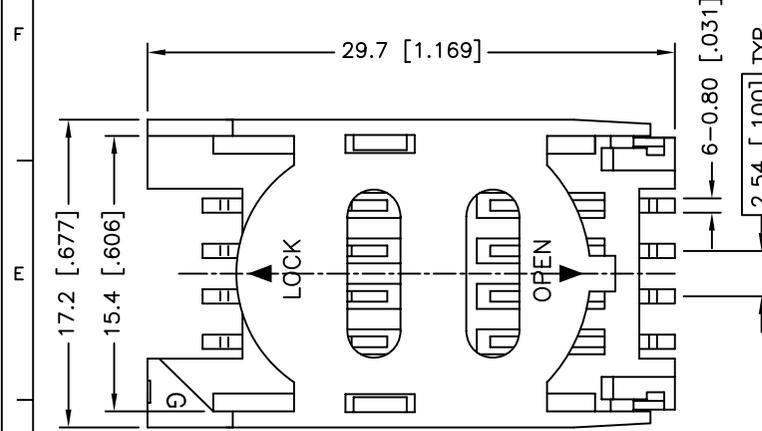

RECOMMEND P.C.B. LAYOUT
TOLERANCE ± 0.05
TOP VIEW


MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. COVER : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
3. TERMINAL : COPPER ALLOY(t=0.20mm), GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAILS.

SPECIFICATION



1. CURRENT RATING : 1.0 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

ORDER INFORMATION:

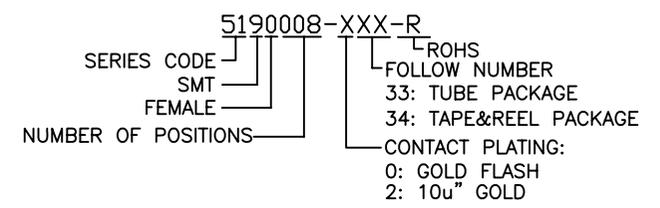


TOLERANCE .0=±.25 [.010] .00=±.15 [.006] .000=±.05 [.002] .0000=±. ANG.=±3°		DRAWER <i>yum</i>		 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>Eric</i>		
SCALE NONE	SIZE A4	SHEET 1 OF 2	REV. B	DRAW NO. R5190008-X33(4)-R

REV.	DESCRIPTION	DATE
A	RELEASE	Jul 18,2006
B	06'1233	Dec 29,2006

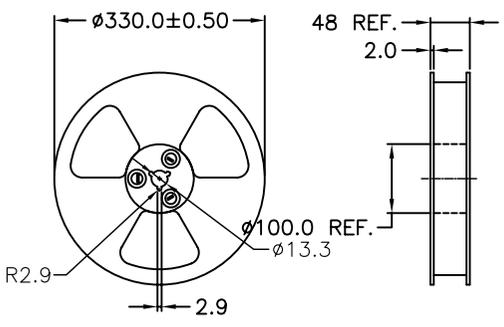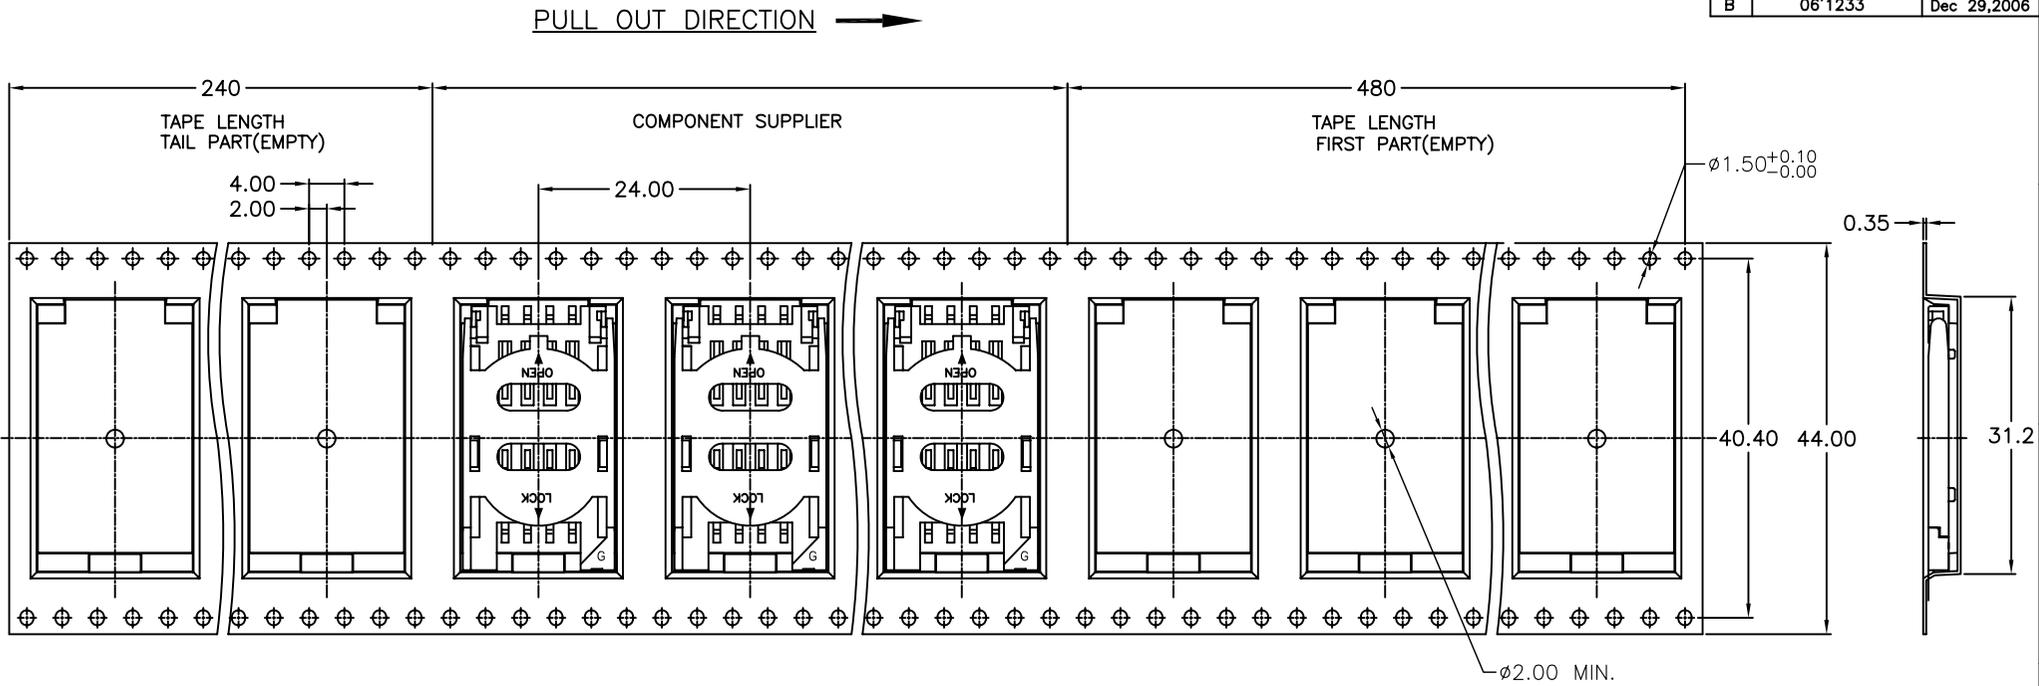

REEL FOR CARRIER TAPE

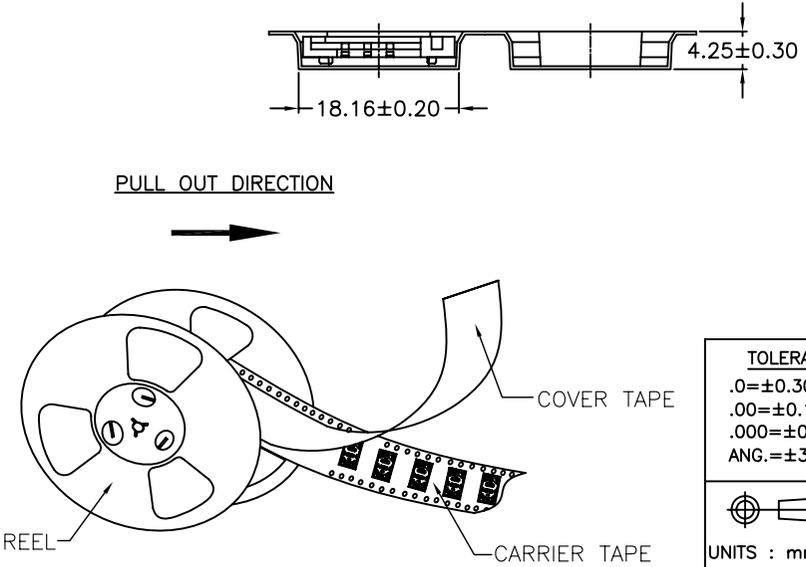

TAPE & REEL PACKAGE :

MATERIALS

1. CARRIER TAPE: POLYSTYREN (PS)
2. COVER TAPE: POLYSTYREN (PS)
3. REEL: POLYSTYREN (PS)

QUANTITY

1. 650PCS PER REEL
2. 6 REEL PER CARTON(3900PCS PER CARTON)

TOLERANCE	
.0=±0.30	
.00=±0.10	
.000=±0.05	
ANG.=±3°	

DRAWER <i>yun</i>
CHECK <i>Eric</i>
APP'D <i>Wisely</i>
PRODUCT SPEC. —
UNITS : mm [inch]
SCALE NONE
SIZE A4
SHEET 2 OF 2
REV. B

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	2.54PH SIM CARD SMT 6PIN (ROHS)
DRAW NO.	R5190008-X33(4)-R