


REV.	DESCRIPTION	DATE
A	RELEASE	May. 05, 2014

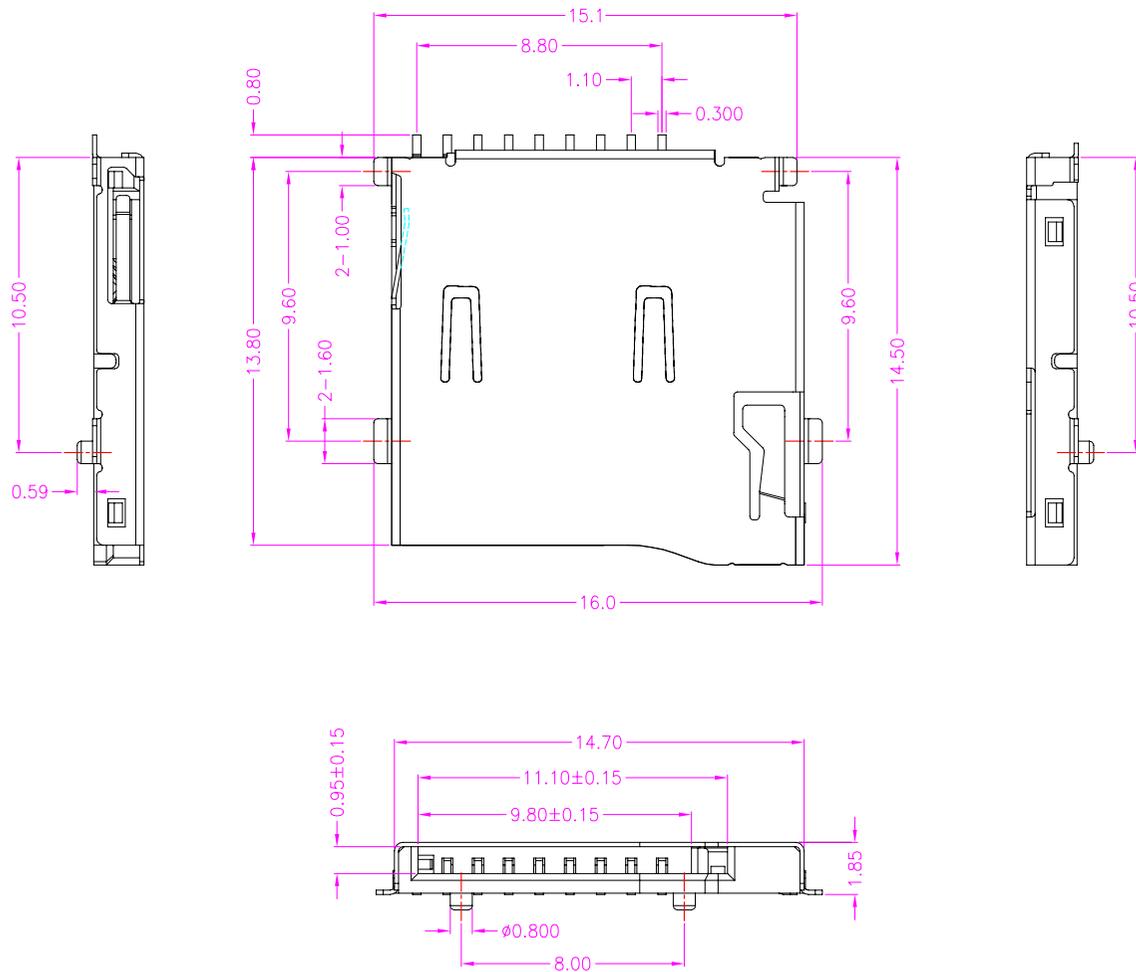


MATERIALS

- HOUSING : HI-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY.

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 100m OHMS MAX.
- DURABILITY : 10,000 CYCLES.
- OPERATING TEMPERATURE : -20°C TO +60°C.

PART NUMBER INFORMATION

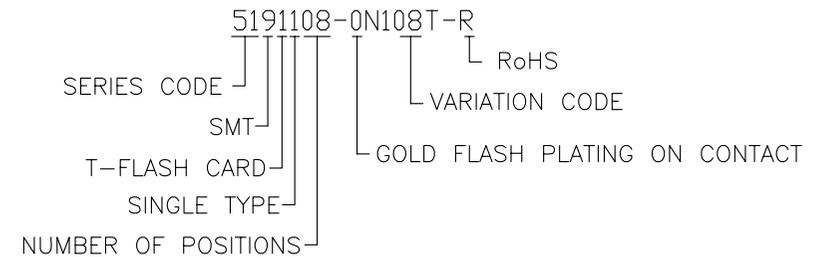

TOLERANCE .0=±0.38 .00=±0.25 .000=±0.10 .0000=±. ANG.=±3°		DRAWER <i>weicong xu</i>		Astron WWW.ASTRON.COM.TW
		CHECK <i>barvery</i>		
UNITS : mm		APP'D <i>Johnson</i>		NAME T-FLASH CONNECTOR PUSH-PUSH TYPE
SCALE NONE		PRODUCT SPEC. —		DRAW NO. 5191108-0N108T-R
SIZE A4	SHEET 1 OF 2	REV. A		

