
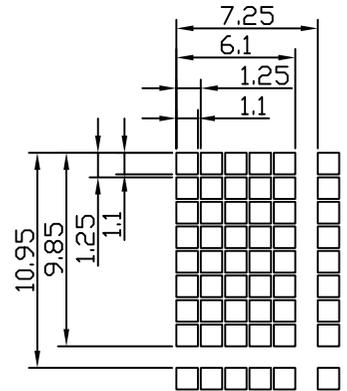



Revised Record

| | | | | | | | | | |
|-----|---|------------|--|--|--|--|--|--|--|
| 1.0 | New issue(change interface base on -04) | 2018-03-09 | | | | | | | |
|-----|---|------------|--|--|--|--|--|--|--|

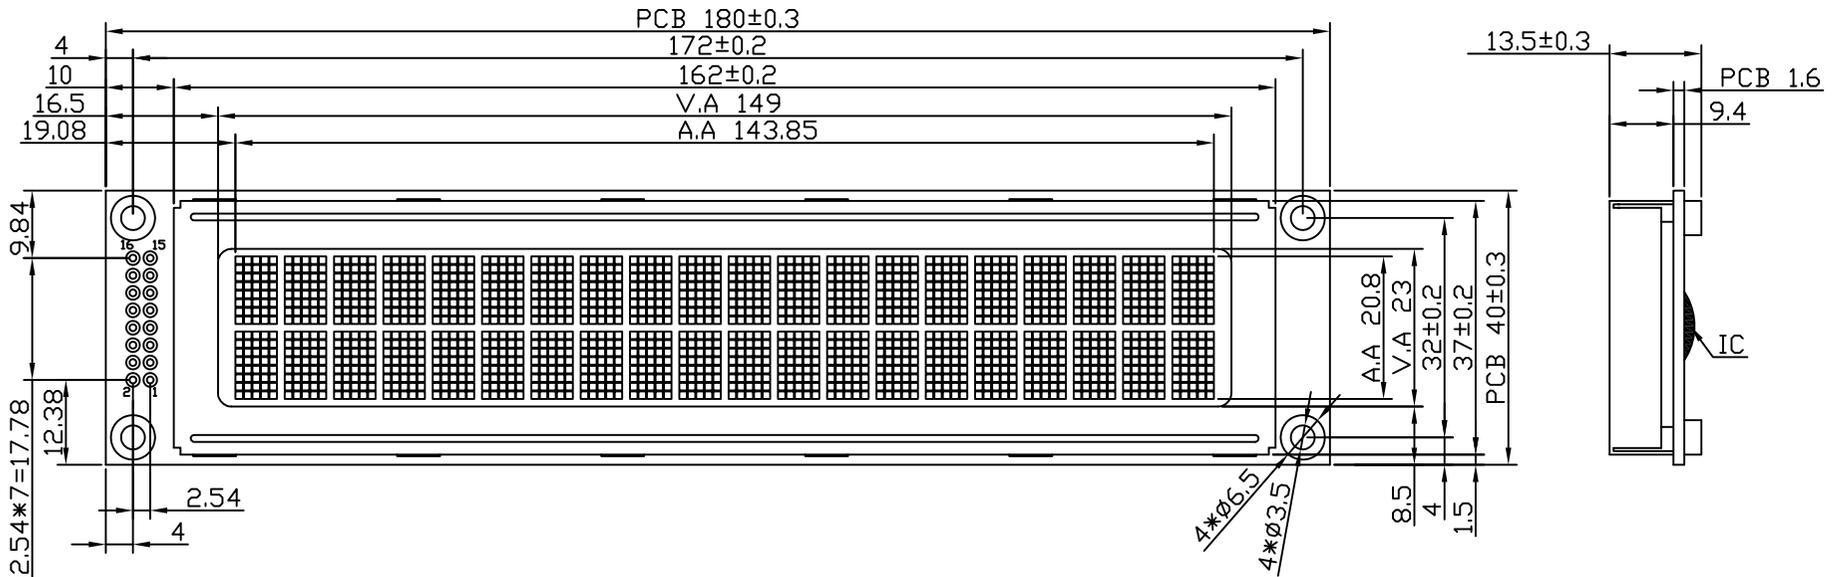



| INTERFACE | |
|-----------|-------|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | RS |
| 5 | RW |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | A/Vee |
| 16 | K |

Customer's Choices:

| | |
|---------------|--|
| DISPLAY TYPE: | |
| View angle: | |
| Temp: | |
| Voltage: | |
| IC: | |
| Fonts: | |
| Backlight: | |
| Other: | |

- NOTES:
- 01. DISPLAY TYPE: STN-YG/POSITIVE/TRANSFLECTIVE RoHS
 - 02. OPERATING VOLTAGE: VOP=4.7V,VDD=5.0V
 - 03. OPERATING TEMPERATURE: -20°C~+70°C
 - 04. STORAGE TEMPERATURE: -30°C~+80°C
 - 05. DRIVE MODE: 1/16DUTY,1/5BIAS
 - 06. VIEWING DIRECTION: 12:00
 - 07. DRIVE IC: ST7066U-0T(OR-EQV)
 - 08. CONNECTOR: ZEBER
 - 09. BACKLIGHT: LED(YELLOW-GREEN,VF:5.0V±0.2,IF:60MA)
 - 10. CUSTOMER'S PART ID: BLAZE_STANDARD_PRODUCT

BLAZE Blaze Display Technology Co.,Ltd.

| | | |
|--|---|------------------|
| DESIGNED BY: BDT-15 | BCB2002-04A-SERIES | VERSION: 1.0 |
| CHECKED BY: BDT-06 |   | PAGE 1 OF 1 |
| APPROVED BY: BDT-01 | | UNIT: mm |
| Website: http://www.blazedisplay.com | | DATE: 2018-03-09 |