


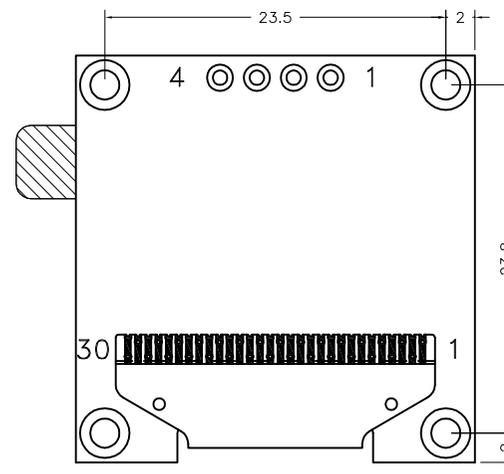
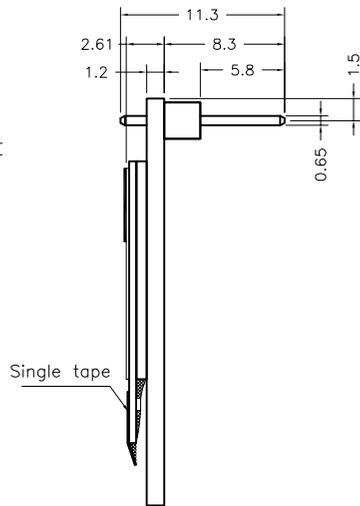


All Pages Of This Edition Approved

Signature: _____

Date: _____

REV.	DESCRIPTION	REVISER	DATE
A0	First	liuqian	2018-6-7
A1	OLED由白色更改为蓝色	liuqian	2018-6-9
A2	按客户要求增加排针	liuqian	2018-8-14
A3	按客户要求更改为黄色和蓝色双色屏	liuqian	2018-8-29

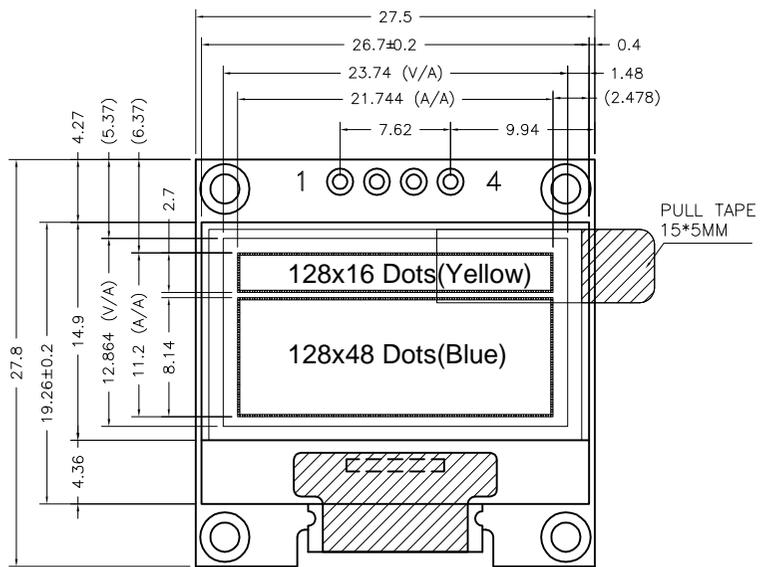

PIN	SYMBOL
1	VCC
2	GND
3	SCL
4	SDA

PIN	SYMBOL
1	NC(GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	NC
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VLSS
30	NC(GND)

Specifications:

1. Display : OLED(Yellow & Blue).
3. Drive Method: VCC=3.3V~4.2V
4. Dot Matrix: 128*64
5. Dot Size: 0.15*0.15mm
6. Dot Pitch: 0.17*0.17mm
7. Aperture Rate: 78%
8. Active Area : 21.74*11.2mm
9. Drive IC: SSD1306
10. Requirements On Environmental Protection: RoHS

Blaze Display Technology Co., Ltd.

Unspecified Tolerance: ±0.20	UNITS: mm	DATE: 2018-8-29	MODEL NUMBER : BDO-12864096YB-01		SHEET: 1 OF 1
DESIGN BY: LIUGONG	CHECKED BY:	APPROVED BY:	DO NOT SCALE THIS DRAWING.		SCALE: 1 : 1