



REV.	ECN NO.	REVISED	DATE




NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
 - b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: A*U")
- SEE ORDERING INFORMATION

2. ELECTRIC:


- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

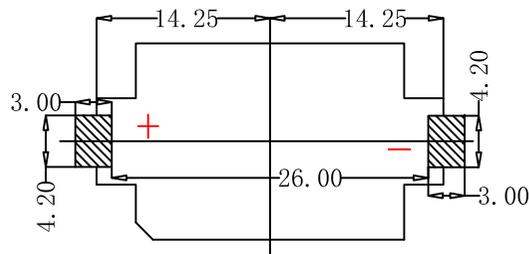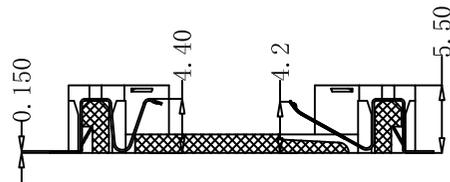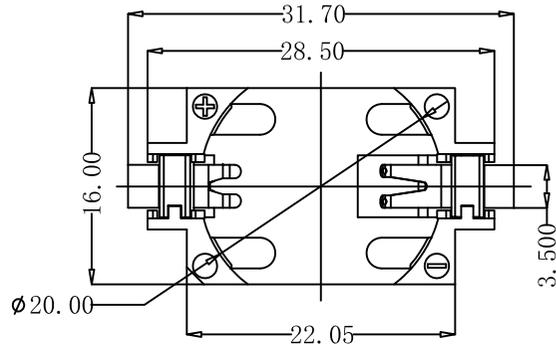

PCB Layout Diagram
Top View

ORDERING INFORMATION

BS-06-B***002

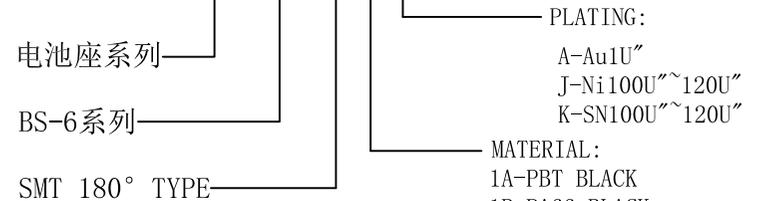

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.15MM	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.15MM	Gold Plating and Ni Under-Plating
1	HOUSING	1	LCP	WHITE
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES						
DECIMALS: X : ±0.30 X.X : ±0.25 X.XX : ±0.20 X.XXX : ±0.10	ANGLES: X : ±1° X.X : ±0.5°	SCALE: 1:1	SIZE: A4	VIEW:	PART NO: BS-06-B4AA002	
WEIGHT: 1.4 g		UNIT: mm	REV.: A/0	OBJECT: MY	TITLE: BS-2032-6 AU SMT	
SHEET 1 OF 1		DSND	YangFeng	DATE		2011. 1. 10
		CHKD	ZhouRuicai	DATE		2011. 1. 11
		APVD	XueZhengy	DATE	2011. 1. 11	