

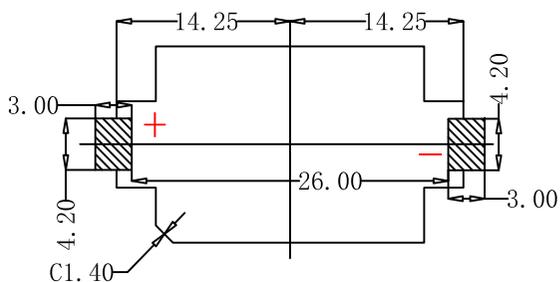


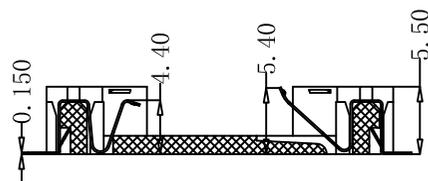

REV.	ECN NO.	REVISED	DATE

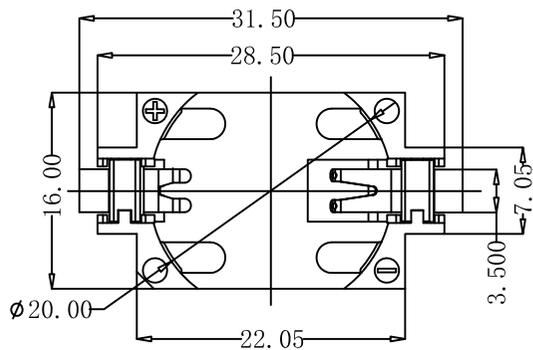


PCB Layout Diagram
Top View

NOTE:

- MATERIAL:
 - HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
 - CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: Sn100U")
SEE ORDERING INFORMATION
- ELECTRIC:
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 - DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 - OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

BS-06-B***001

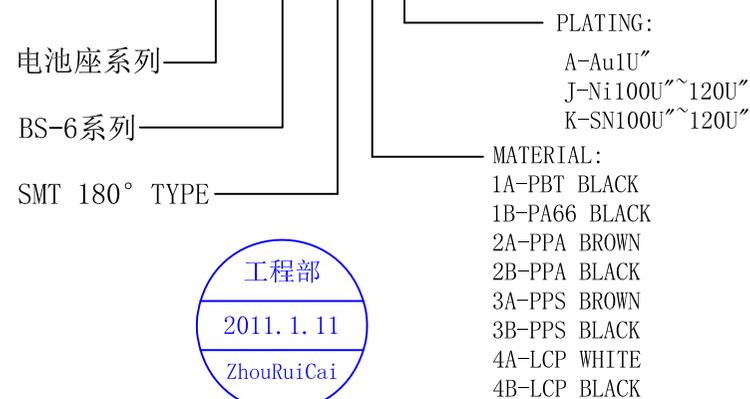

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.15MM	Sn-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.15MM	Sn-Plating
1	HOUSING	1	LCP	WHITE
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES						
DECIMALS: X : ±0.30 X.X : ±0.25 X.XX : ±0.20 X.XXX : ±0.10	ANGLES: X : ±1° X.X : ±0.5°	SCALE: 1:1	SIZE: A4	VIEW:	PART NO: BS-06-B4AK001	
WEIGHT: 1.4 g		UNIT: mm	REV.: A/0	OBJECT: MY	TITLE: BS-2032-6 Sn SMT	
SHEET 1 OF 1		DSND	YangFeng	DATE		2011.1.10
		CHKD	ZhouRuicai	DATE		2011.1.11
		APVD	XueZhengy	DATE	2011.1.11	