


## RM 6

### Accessories


#### Clamp

- With ground terminal, made of stainless spring steel (tinned), 0.435 mm thick
- Solderability to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s
- Also available as strip clamp on reels on request

	Ordering code
Clamp (ordering code per piece, 2 are required)	B65808A2203X000

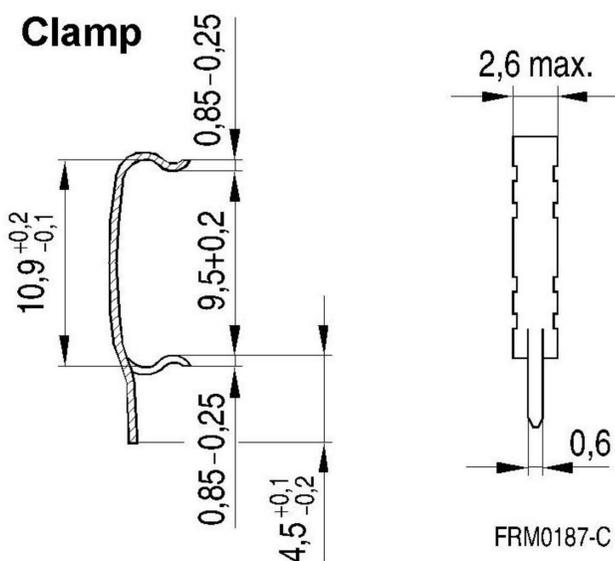

#### Clamping forces for RM 6

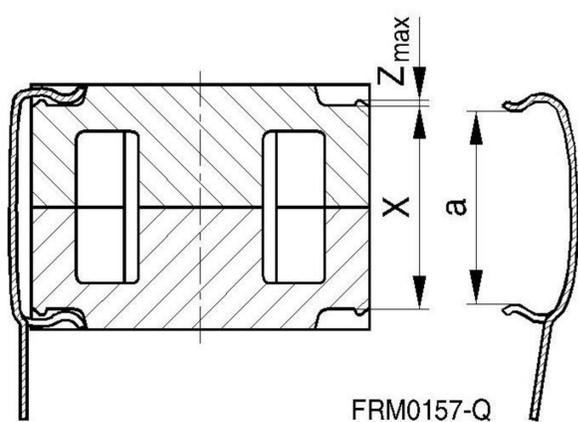

$F_{\min}$ : Extension of clamp from  $a$  to  $a_2 = X_{\min}$

$F_{\max}$ : Extension of clamp from  $a$  to  $a_1 = X_{\max}$

Clamp opening $a$ (mm)		9.5 +0.2
Core nose $Z_{\max}$ (mm)		0.22
Height of core pair $X$ (mm)	$X_{\min}$	10.1
	$X_{\max}$	10.6
Clamping force $F$ (N)	$F_{\min}$	7
	$F_{\max}$	50