
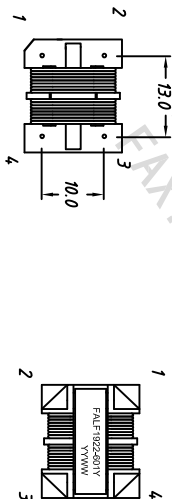



P/N: FALF1922-601Y

Date	Rev.	Revisions Rec.

Mechanical Dimensions : (mm)

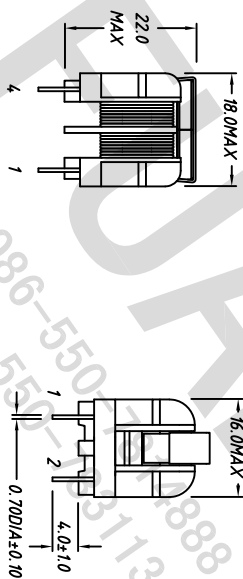


Winding Construction:

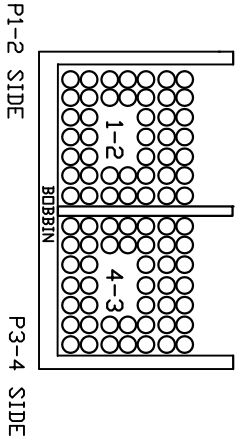

Note : Temp 20°C 48% RH. RoHS compliant.

Coil structure and schematic

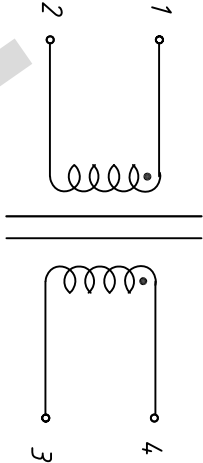

Electrical Specifications:

Inductance : L1-2&4-3 0.60mH Min @10KHz 0.1V

Rated current: 1.5A.

RDC : 1-2&4-3 0.15 Ohm MAX

Hi-Pot : Coil-Coil-Core 2500VAC/1mA/60Second

Bobbin: UU10.5-4P/T375J.

core: UU10.5-H10K

wire: UFW-B.

Varnish: TYPE NO.:1032BH E213437

PAIRUI TEL: +86-550-7814888
Fax: +86-550-7831133
www.fuantronics.com

Model: UU10.5 common choke

Document No.: 1202057
Rev.: 00

Unless Otherwise Specified
TOLERANCES: .X : ±0.50
.XX : ±0.25
Dimensions in mm

DWN . Yuingyu
CHK . Anson. zhan
APP . Louis. Lin

DATE: Mar./01/2012
Page No.: 1 OF 1

PROPRIETARY

Document is the property of FUAN Inc & is not allow to be duplicated without authorization