

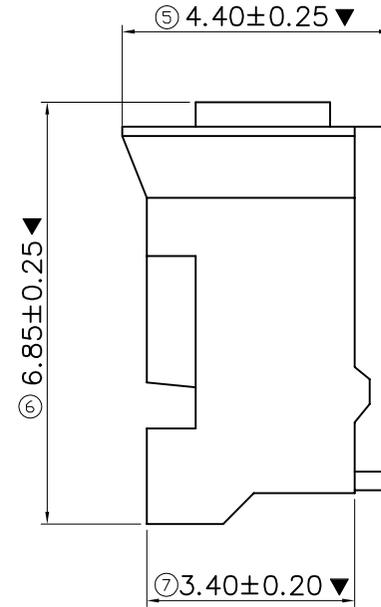


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
AO	2021.03.10	***	NEW
			APPROVER
			Abel

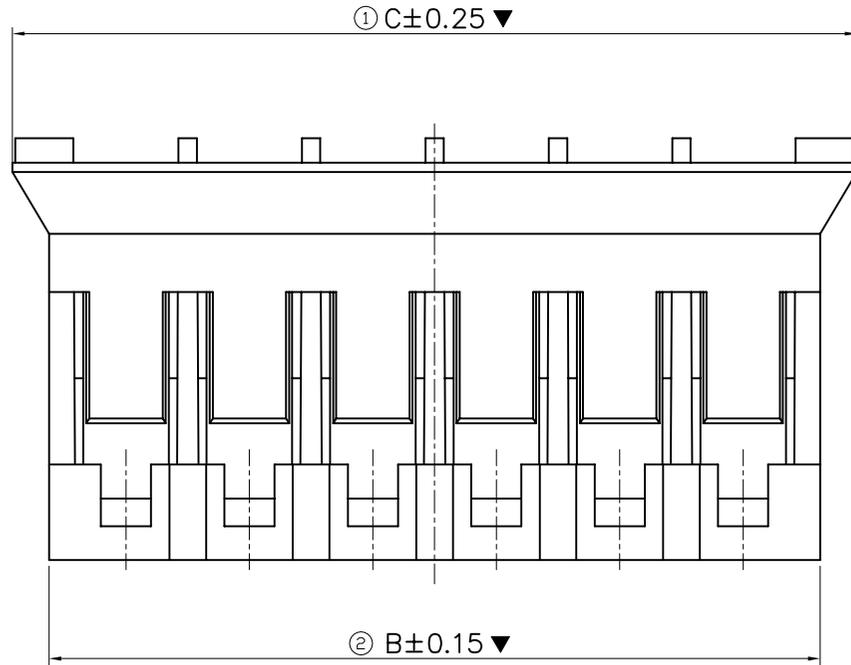

NOTE:  
 Material:  
 Housing: Nylon UL94V-0  
 Electrical:  
 1.Current Rating: 2A  
 2.Voltage Rating: 200V  
 3.Contact Resistance: 20mΩ MAX  
 4.Dielectric Withstanding Voltage: 500V AC  
 5.Insulation Resistance: 1000MΩ MIN  
 Major Dimension: ▼  
 Lead free and ROHS compliant product.

CKT	A	B	C
2	2.00	4.50	5.70
3	4.00	6.50	7.70
4	6.00	8.50	9.70
5	8.00	10.50	11.70
6	10.00	12.50	13.70
7	12.00	14.50	15.70
8	14.00	16.50	17.70
9	16.00	18.50	19.70
10	18.00	20.50	21.70
11	20.00	22.50	23.70
12	22.00	24.50	25.70
13	24.00	26.50	27.70
14	26.00	28.50	29.70
15	28.00	30.50	31.70
16	30.00	32.50	33.70

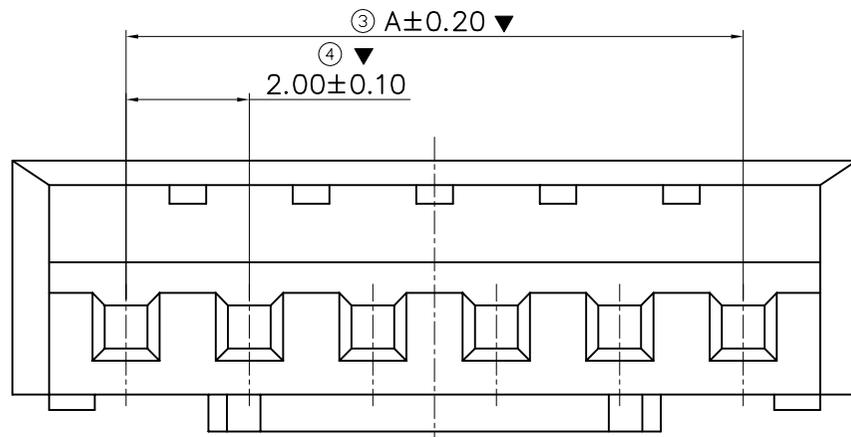

GENERAL TOLERANCE			UNITS	NAME (INTENDED USE)		<b>ATOM</b> 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.		
SELECT	✓		mm	HOUSING				
TOL.	1	2	3	MAT'L	PART NO. (INTENDED USE)			
X.XXX	±0.10	±0.15	±0.20	FINISH	H0200**-01***			
X.XX	±0.15	±0.20	±0.25		APPD: Abel			
X.X	±0.20	±0.25	±0.30	Q'TY	CHKD: Tom			
X.	±0.25	±0.30	±0.50		DR: Ling			
ANGLE	±2'							
						SCALE	SHEET	REV.
						1:1	1/1	AO