


868MHz Omni Outdoor Fiberglass Antenna

JCF868-5.8



DIMENSIONS





Jinchang Electron Global Service

SPECIFICATIONS

Electrical Specifications	
Model No.	JCF868-5.8
Frequency Range	868MHz
Gain	5.8dBi
VSWR	≤1.5
Input Impedance	50Ω
Polarization	Vertical
Horizontal Half Power Angle	360°
Vertical Half Power Angle	32°
Front to Back Ratio	≥15dB
Max Input Power	50W
Lightning Protection	DC Ground
Mechanical Specifications	
Connector Type	N male
Working Temperature	-40°C~ + 65°C
Antenna Weight	420g
Pole Diameter	Φ35~φ55mm
Size	Φ20*800mm
Rated Wind Velocity	210km/h
Cover Material	Fiberglass
Color	White

Mechanical Characteristics

1	BENDING TEST	Putting it 30cm away from the connector and load on 120g. Making bending test after fixing the connector. The swing angle is about 60 degree. Testing the characteristics after swing 1000 times.	No sign of damage displayed in electrical and mechanical performance after swinging 1000 time.
2	STRENG TEST	Putting a 15 pounds static load on the end of the cable and last for 1 minute.	No sign of damage displayed in electrical and mechanical performance
3	PULLING FORCE	Measure the pulling force between connector and cable with a tensimeter.	No sign of damage displayed in electrical performance under the pulling force of 7kg.
4	VIBRATION TEST	The amplitude is 1.10mm and the vibration frequency is 33.30hz/sec. First, vibration in x direction for 120 minutes. Then vibration in y direction for 120 minutes. Last, vibration in z direction for 240 minutes.	No sign of damage displayed in electrical performance.

Mechanical Characteristics


1	SAIT SPRAY TEST	Salt spray standard: GB1266-86 Distilled water: distilled once PH6.5~7 Spray volume: 1.4me80cm ² /h Compressed air pressure: 1Kgf/ cm ² Test relative degree: 98° Temperature: 45° ~47° Pressure temperature: 35° Test time: 96hr	All characteristic range is 30% of the initial value
2	HEAT TEST	85+2°C for 96 hours, after keep in normal condition for 30mim the to test.	
3	HUMIDITY TEST	40+2°C 90-95%RH for 96hours, after keep in normal condition for 30mim the to test.	
4	COLD TEST	-40+2°C for 96hours, after keep in normal condition for 30mim the to test.	

Test drawing

1. Return Loss



2. Smith chart

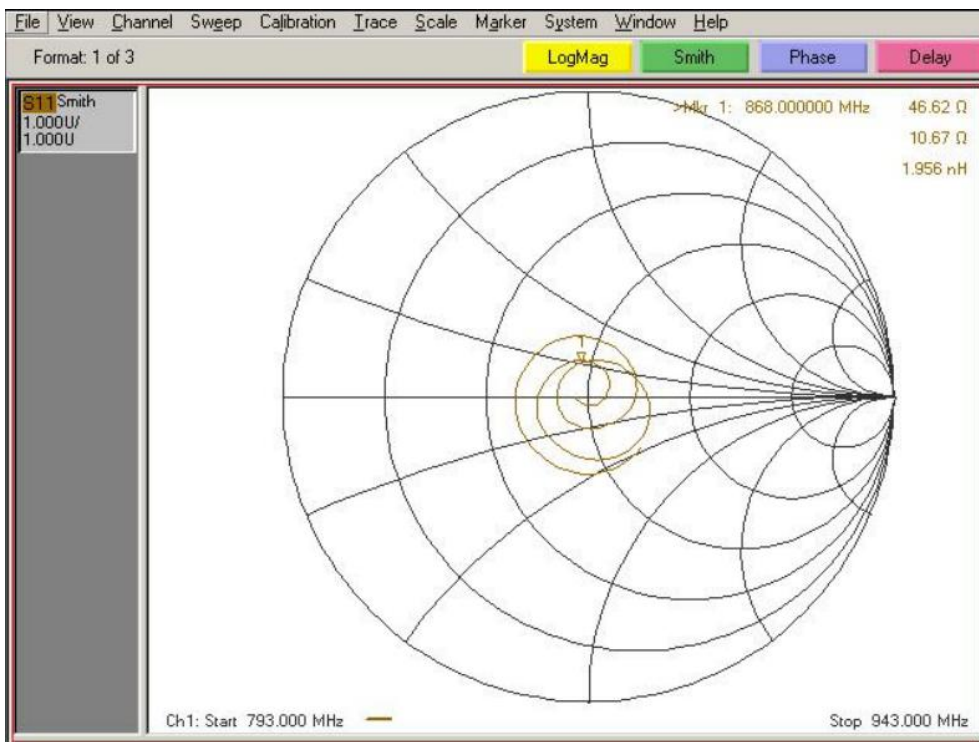

3. VSWR

JIAXING JINCHANG ELECTRONIC TECHNOLOGY CO.,LTD

Add: 398#, Zhenye Road, South Street, Jiaxing, Zhejiang, China

Http:// www.jinchanggps.com

E-mail: jcgps@vip.163.com

Tel: 86-0573-83692157/83692605/83958637 Fax: 86-0573-83958635



Jinchang Electron Global Service



JIAXING JINCHANG ELECTRONIC TECHNOLOGY CO.,LTD
Add: 398#,Zhenye Road, South Street, Jiaxing, Zhejiang, China
Http:// www.jinchanggps.com E-mail:jcgps@vip.163.com
Tel: 86-0573-83692157/83692605/83958637 Fax:86-0573-83958635