
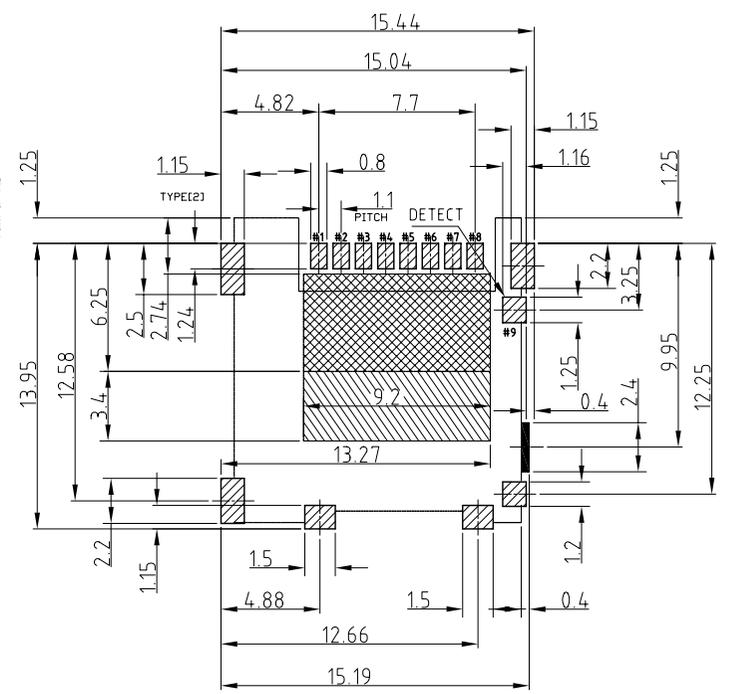
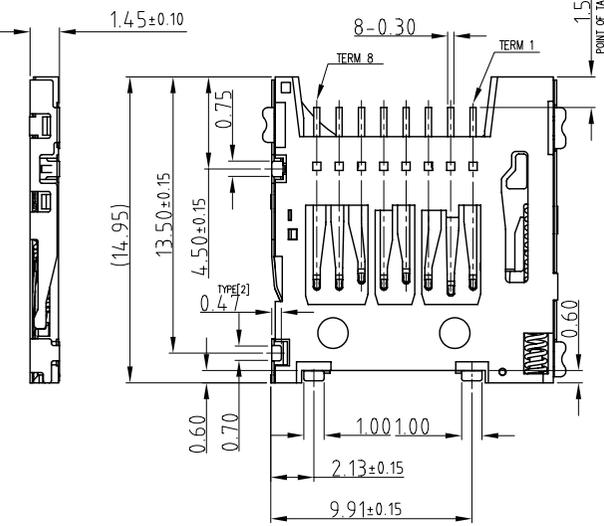


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2013/07/11	/	NEW	Vicky




TERM 1	DATA 2
TERM 2	CD/DATA 3
TERM 3	CMD
TERM 4	VDD
TERM 5	CLK
TERM 6	VSS
TERM 7	DATA 0
TERM 8	DATA 1
TERM 9	DETECT

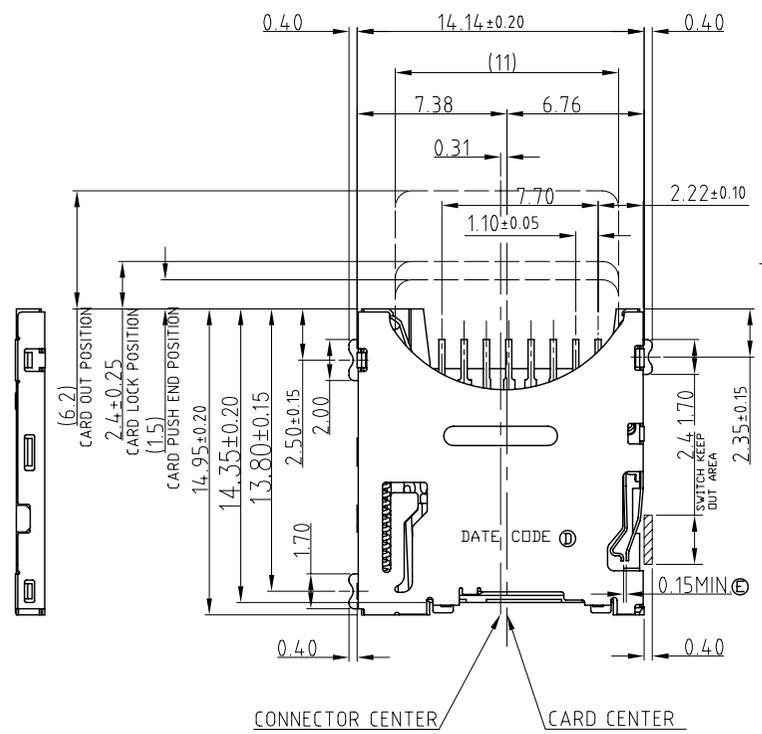

RECOMMENDED  
PCB PATTERN LAYOUT(TOP VIEW)  
TOLERANCE: ±0.05

SOLDERPROHIBITED AREA   
 PROHIBITED AREA   
 PATTERN PROHIBITED AREA

0.10  
ALL TAILS

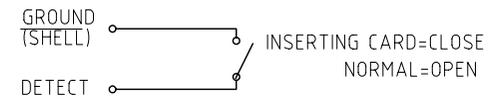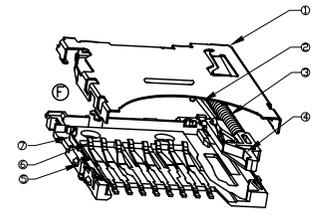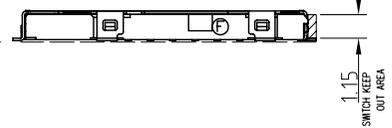

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CURRENT RATING: 0.5 Amp. MAX.
    - VOLTAGE: 100V DC. MAX.
    - LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
    - INSULATION RESISTANCE: (INITIAL) 1000MOhms MIN.. (FINAL) 100MOhms MIN.  
BY APPLYING 500V DC ON MATED AND UNMATED CONNECTORS THROUGH MIL-STD-202, METHOD 302.
  - MECHANICAL CHARACTERISTICS:
    - DURABILITY: 5000 CYCLES.
    - OPERATING TEMP. RANGE: -25°C TO 85°C. [INCLUDING TERMINAL TEMP. RISE]
    - STORAGE TEMP.: -40°C TO 85°C.
  - QUANTITY OF PRODUCTS: 1400PCS/REEL

7	DETECT	1	COPPER ALLOY	GOLD PLATING
6	TERMINAL	1	COPPER ALLOY	GOLD PLATING
5	HOUSING	1	THERMAL PLASTIC	
4	SLIDER	1	THERMAL PLASTIC	
3	SPRING	1	SUS	
2	CAM FOLLOWER	1	SUS	
1	SHELL	1	SUS	Ni PLATING
NO.	PART NAME	Q'TY	DESCRIPTION	

GENERAL TOLERANCE		UNITS	mm	NAME:	卡座	深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓			PART NO:	MR13A-02200	TITLE: MICRO SD CARD PUSH 端子内脚 超薄型 H=1.45			
ON.	TOL.	1	2	3	APPD:	Vicky	DWG NO. ATOM-A01598		
X.XXX	±0.05	±0.05	±0.15		CHKD:	Doris	SCALE SHEET REV		
X.XX	±0.15	±0.13	±0.25		DR:	deng	1:1	1/1	A
X.X	±0.25	±0.25	±0.50						
X.		±0.38	±1.00						
ANGLE									