

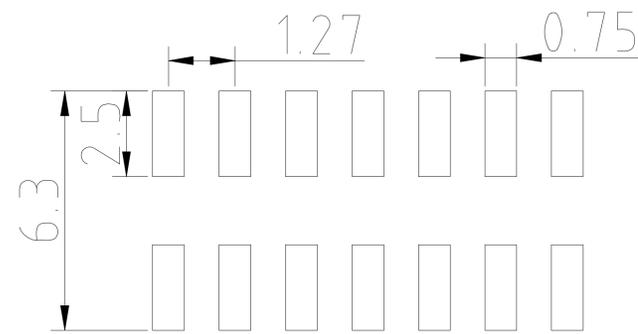
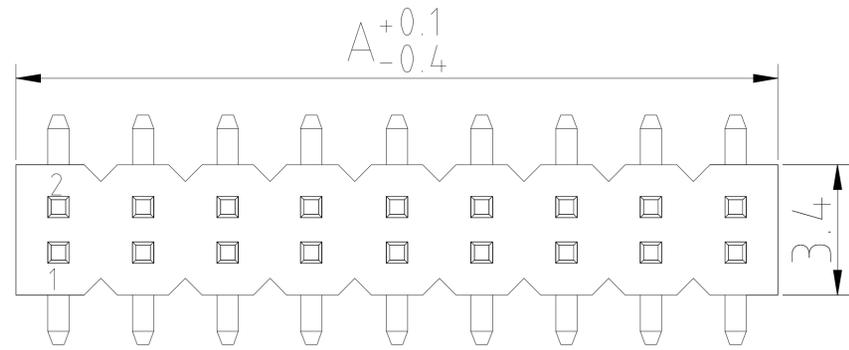


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2017/10/20	/	NEW	Vicky

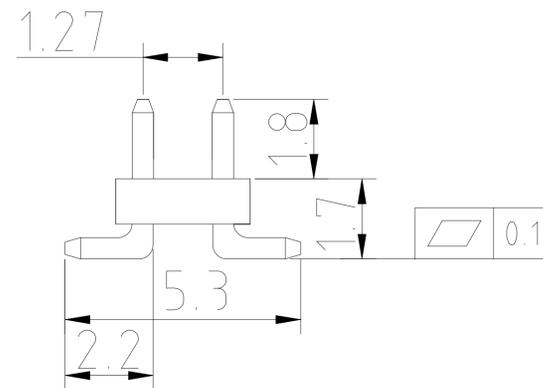

P.C.B LAYOUT

REFERENCE TOLERANCE: ±0.05

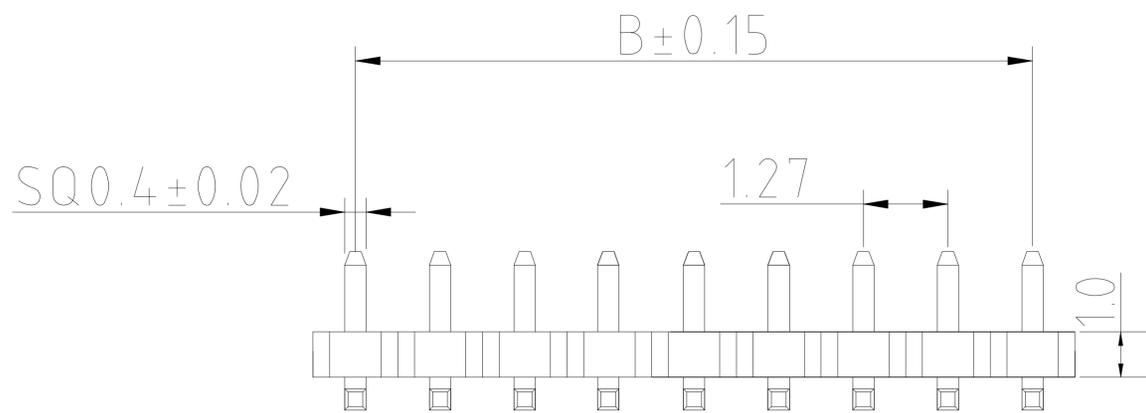

PIN NO:	A	B
2×1pin		
2×2pin	2.54	1.27
2×3pin	3.81	2.54
2×4pin	5.08	3.81
2×5pin	6.35	5.08
2×6pin	7.62	6.35
2×7pin	8.89	7.62
2×8pin	10.16	8.89
2×9pin	11.43	10.16
2×10pin	12.7	11.43
2×11pin	13.97	12.7
2×12pin	15.24	13.97
2×13pin	16.51	15.24
2×14pin	17.78	16.51
2×15pin	19.05	17.78
2×16pin	20.32	19.05
2×17pin	21.59	20.32
2×18pin	22.86	21.59
2×19pin	24.13	22.86
2×20pin	25.4	24.13
2×21pin	26.67	25.4
2×22pin	27.94	26.67
2×23pin	29.21	27.94
2×24pin	30.48	29.21
2×25pin	31.75	30.48
2×26pin	33.02	31.75
2×27pin	34.29	33.02
2×28pin	35.56	34.29
2×29pin	36.83	35.56
2×30pin	38.1	36.83
2×31pin	39.37	38.1
2×32pin	40.64	39.37
2×33pin	41.91	40.64
2×34pin	43.18	41.91
2×35pin	44.45	43.18
2×36pin	45.72	44.45
2×37pin	46.99	45.72
2×38pin	48.26	46.99
2×39pin	49.53	48.26
2×40pin	50.8	49.53
2×41pin	52.07	50.8
2×42pin	53.34	52.07
2×43pin	54.61	53.34
2×44pin	55.88	54.61
2×45pin	57.15	55.88
2×46pin	58.42	57.15
2×47pin	59.69	58.42
2×48pin	60.96	59.69
2×49pin	62.23	60.96
2×50pin	63.5	62.23

SPECIFICATIONS:

- 1.Current Rating: 1Amp
- 2.Insulation Resistance: 1000Megohms min
- 3.Dielectric Withstanding : AC 500V
- 4.Operating Temperature : -40°C~+105°C
- 5.Contact Material: Copper Alloy
- 6.Insulator Material: Thermoplastic,UL94V-0
- 7.plating: Gold plated.

GENERAL TOLERANCE			UNITS	NAME:	PH			ATOM ® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.		
SELECT	✓		mm	PART NO:	PH127***F-03***			TITLE: PH1.27*1.0 2*XP SMT DA=1.8 DB=1.7 展开5.3		
TOL.	1	2	MAT'L	APPD:	Jason			DWG NO. ATOM-A03699		
ON.				CHKD:	Vicky			SCALE SHEET REV		
X.XXX		±0.05	FINISH	DR:	Cmy			1:1 1/1 A		
X.XX	±0.15	±0.13	Q'TY							
X.X	±0.20	±0.25								
X.		±0.38								
ANGLE	±0.5'									