
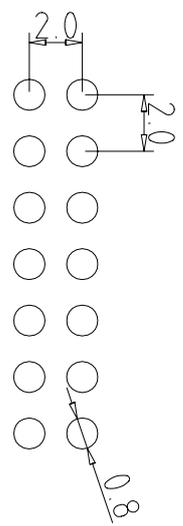
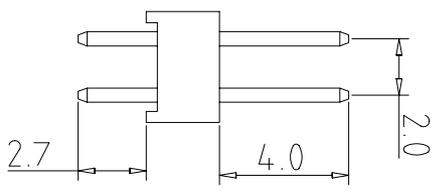
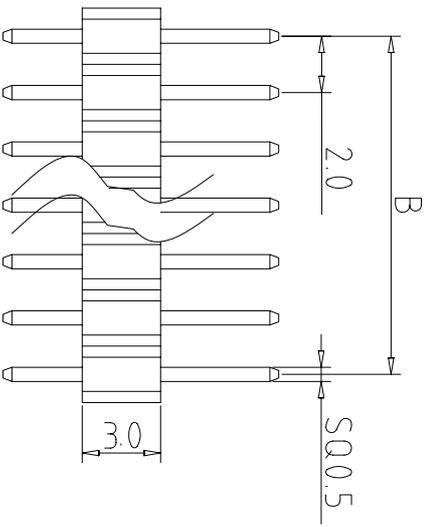


REV.	DATE	ECN NO	MODIFY CONTENT	APPROVER
A	2018.08.06		初版发行	Jason

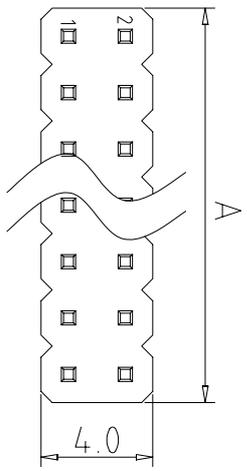

P.C.B LAYOUT

REFERENCE TOLERANCE: ±0.05

PIN NO.	A	B
2x1pin	2.0	
2x2pin	4.0	2.0
2x3pin	6.0	4.0
2x4pin	8.0	6.0
2x5pin	10.0	8.0
2x6pin	12.0	10.0
2x7pin	14.0	12.0
2x8pin	16.0	14.0
2x9pin	18.0	16.0
2x10pin	20.0	18.0
2x11pin	22.0	20.0
2x12pin	24.0	22.0
2x13pin	26.0	24.0
2x14pin	28.0	26.0
2x15pin	30.0	28.0
2x16pin	32.0	30.0
2x17pin	34.0	32.0
2x18pin	36.0	34.0
2x19pin	38.0	36.0
2x20pin	40.0	38.0
2x21pin	42.0	40.0
2x22pin	44.0	42.0
2x23pin	46.0	44.0
2x24pin	48.0	46.0
2x25pin	50.0	48.0
2x26pin	52.0	50.0
2x27pin	54.0	52.0
2x28pin	56.0	54.0
2x29pin	58.0	56.0
2x30pin	60.0	58.0
2x31pin	62.0	60.0
2x32pin	64.0	62.0
2x33pin	66.0	64.0
2x34pin	68.0	66.0
2x35pin	70.0	68.0
2x36pin	72.0	70.0
2x37pin	74.0	72.0
2x38pin	76.0	74.0
2x39pin	78.0	76.0
2x40pin	80.0	78.0

- PECIFICATIONS:
- 1.Current Rating: 2Amp
  - 2.Insulation Resistance: 1000Megohms min
  - 3.Dielectric Withstanding : AC 500V
  - 4.Operating Temperature : -40°C~+85°C

- Electrical Characteristics:
- 1.Contact Material: Copper Alloy
  - 2.Insulator Material: Thermoplastic,UL94V-0
  - 3.plating: Gold plated.
- Lead free and ROHS compliant product.

GENERAL TOLERANCE			UNITS	NAME(INTENDED USE)	TITLE: Customer drawing for PH2.0*2.0 2*xP DIP 180°L=8.7/2.7/4.0
SELECT	✓		mm	PHI	
TOL	1	2			
X.XXX	±0.15	±0.05	FINISH	PART NO.(INTENDED USE)	ATOM 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD
X.XXX	±0.25	±0.13		PH200**D-07***	
X.XX	±0.30	±0.25	Q'TY	APPD: Jason	DWG NO.: ATOM-A04751
X.X	±0.38	±0.38		CHKD: Tom	SCALE 1:1
ANGLE	±5°			DR: Pigo	SHEET 1/1
					REV. A