

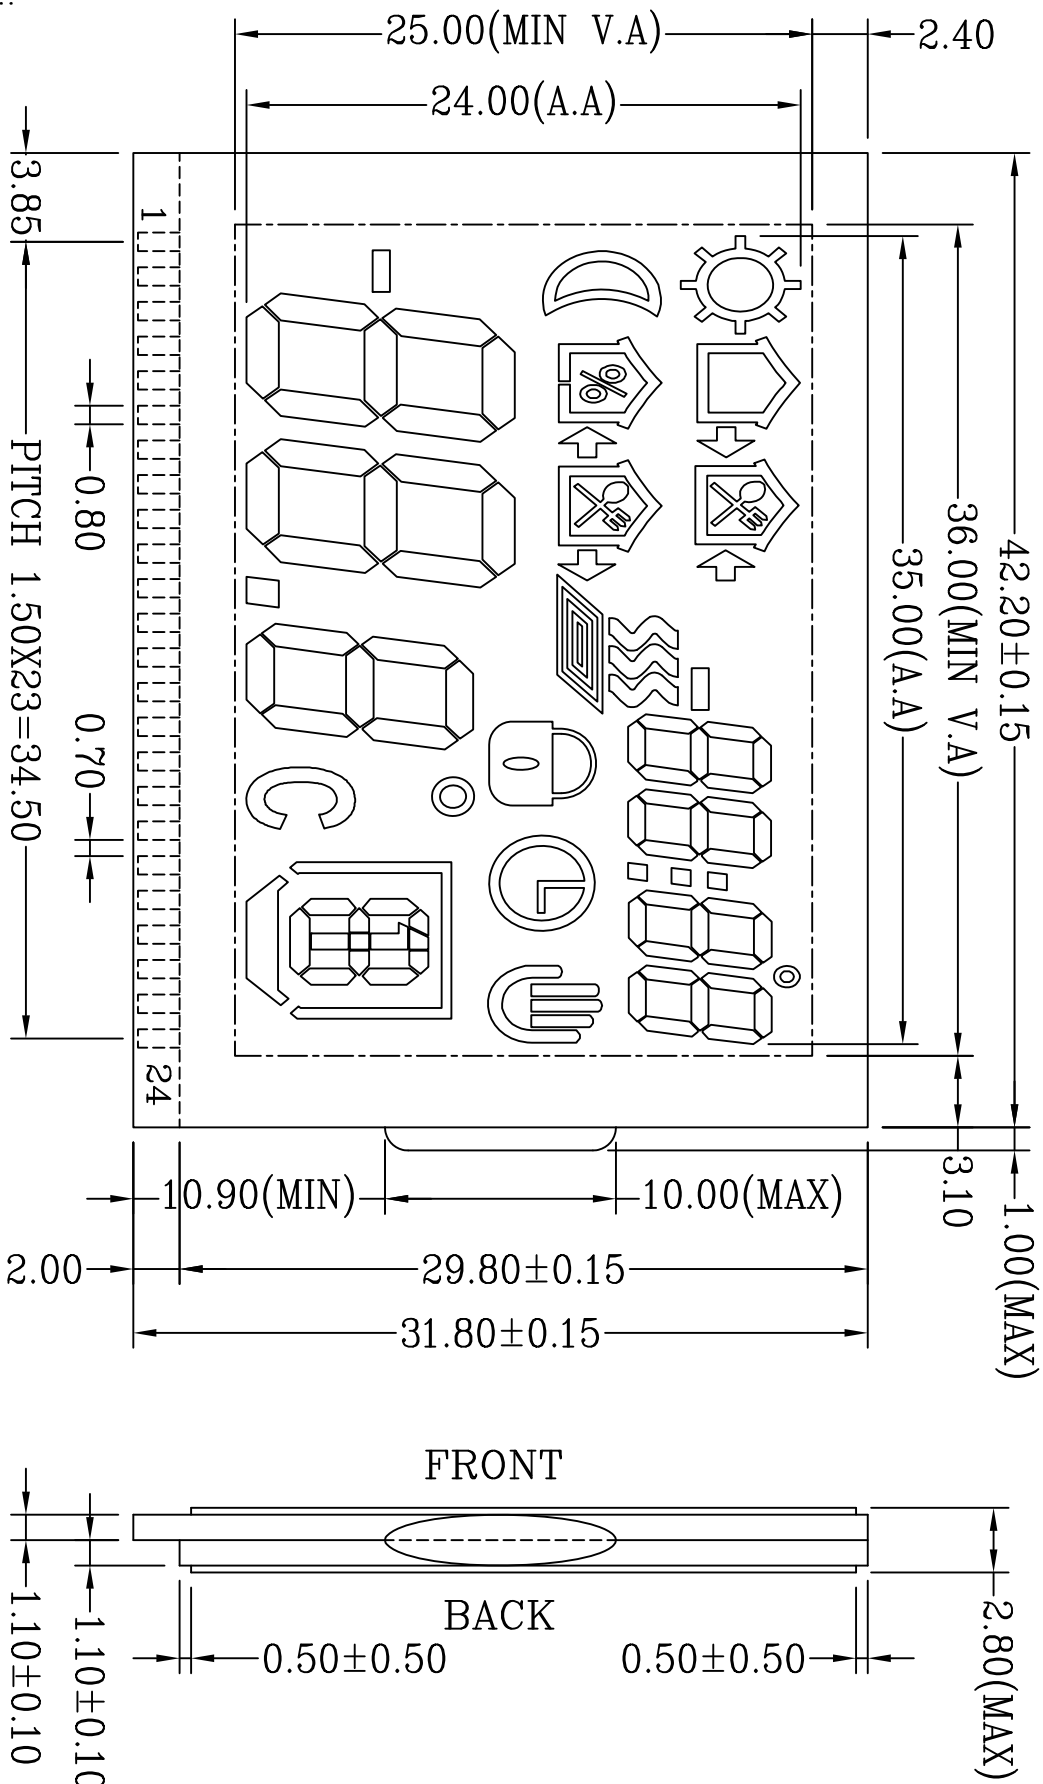


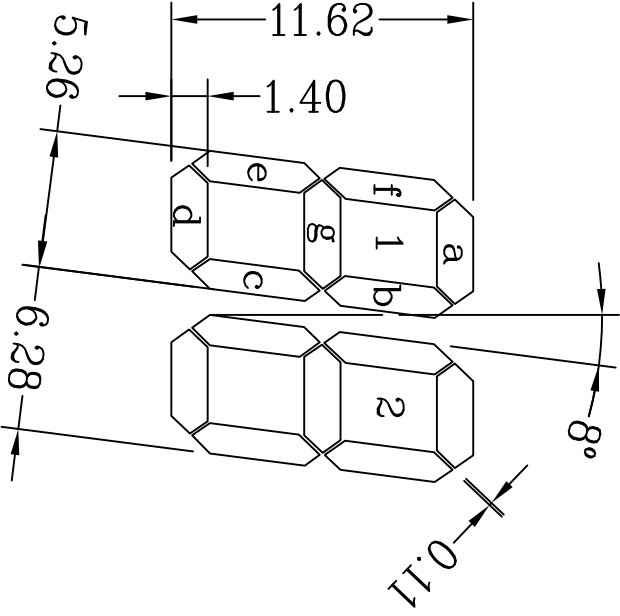

NOTES:

1. Display type: STN-Gray
2. Viewing direction: 12 O'CLOCK
3. Drive method: 1/4DUTY 1/2BIAS
4. Polarizer mode: Transflective/Positive
5. LCD drive voltage: 3.3 V
6. Operation temperature: -20° C T0 +70° C
7. Storage temperature: -30° C T0 +80° C
8. Driver/Controller IC:
9. CONNECTOR: ZEBRA


General Tolerance ±				VERSION	DATE	PART NAME:
1	2	3	4			
0.1	0.05	0.1	0.1	A	2012.07.18	EL00433SK7
0.1	0.05	0.1	0.1	SCALE	UNIT	TITLE:
0.1	0.05	0.1	0.1	NO.	mm	LCD
0.1	0.05	0.1	0.1	1/3	DRAWN	FILE NAME:
0.1	0.05	0.1	0.1	APPROVED	CHECKED	XLP-E: LCD
0.1	0.05	0.1	0.1	0.8		

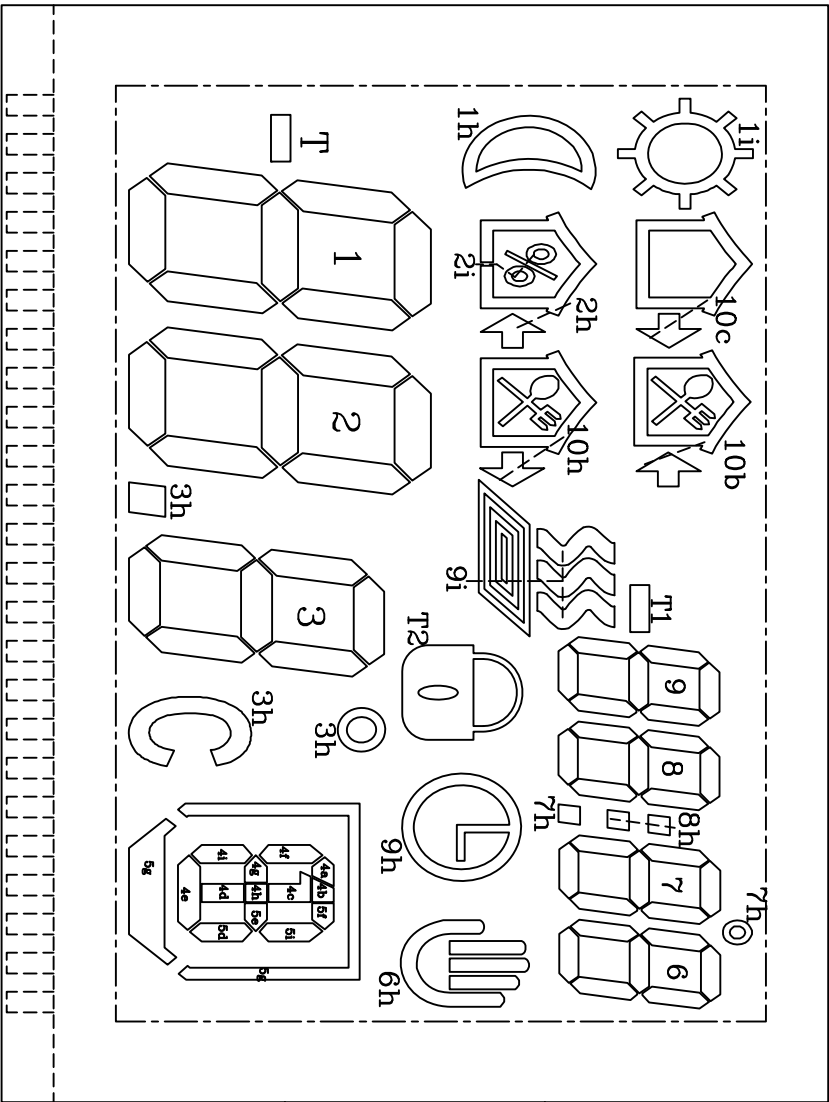

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
COM1	COM1				1a	2h	2a	9h	3a	3h	2i	5d	4d	4i	6h	6d	7h	7d	8h	8d	9i	9d	T2	10h
COM2		COM2			1f	1b	2f	2b	3f	3b	4e	5e	4h	4g	6c	6e	7c	7e	8c	8e	9c	9e	T1	10b
COM3			COM3		1e	1g	2e	2g	3e	3g	5g	5i	4c	4f	6g	6f	7g	7f	8g	8f	9g	9f	10c	
COM4				COM4	1d	1c	2d	2c	3d	3c	1h	5f	4b	4a	6b	6a	7b	7a	8b	8a	9b	9a	T	1i

General Tolerance ±					VERSION	DATE	PART NAME:	
mm	1	2	3	4	A	2012.07.18	EL00433SK7	
0-10	0.05	0.1	0.1	0.2				
10-30	0.05	0.1	0.1	0.2		SCALE	NO.	TITLE:
30-100	0.05	0.1	0.2	0.3			UNIT	
100-300	0.1	0.2	0.3	0.5	2/3	mm	LCD	
300-500	0.1	0.2	0.3	0.5	APPROVED		FILE NAME:	
500-1000	0.1	0.2	0.5	0.8	CHECKED	DRAWN	XLP-E: LCD	
1000-1500	0.1	0.2	0.5	0.8				

1	2	3	4	5	6
REV		REVISION RECORD			APPROVED
A		First Issue			

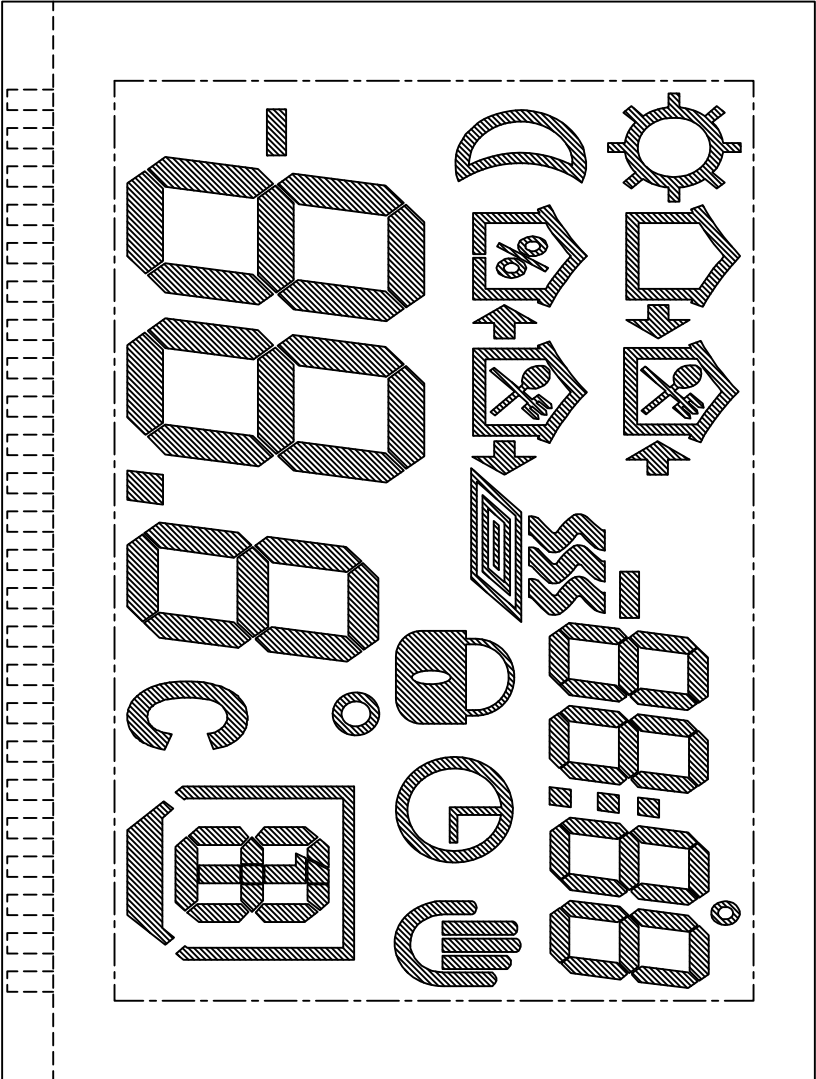

DISPLAY EFFECT

General Tolerance ±					VERSION	DATE	PART NAME:
mm	1	2	3	4	A	2012.07.18	EL00433SK7
1~5	0.05	0.1	0.1	0.2	SCALE	UNIT	TITLE:
5~10	0.05	0.1	0.1	0.2			
10~50	0.05	0.1	0.2	0.3	3 / 3	mm	LCD
50~100	0.1	0.2	0.3	0.5	APPROVED	DRAWN	FILE NAME:
100~300	0.1	0.2	0.5	0.8	CHECKED		XLP-E: LCD
300~							