
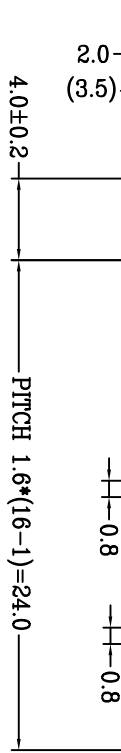
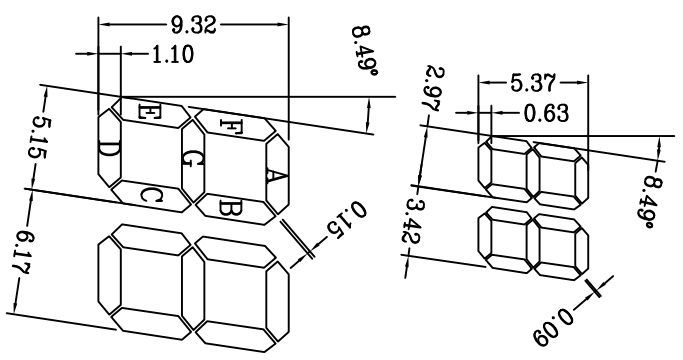
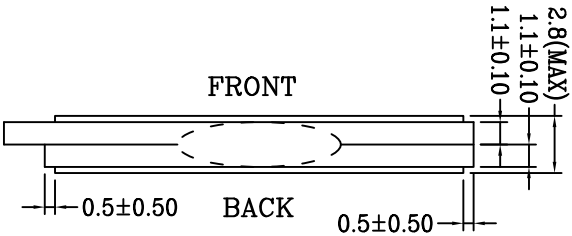


REV	REVISION RECORD	APPROVED
A	First Issue	


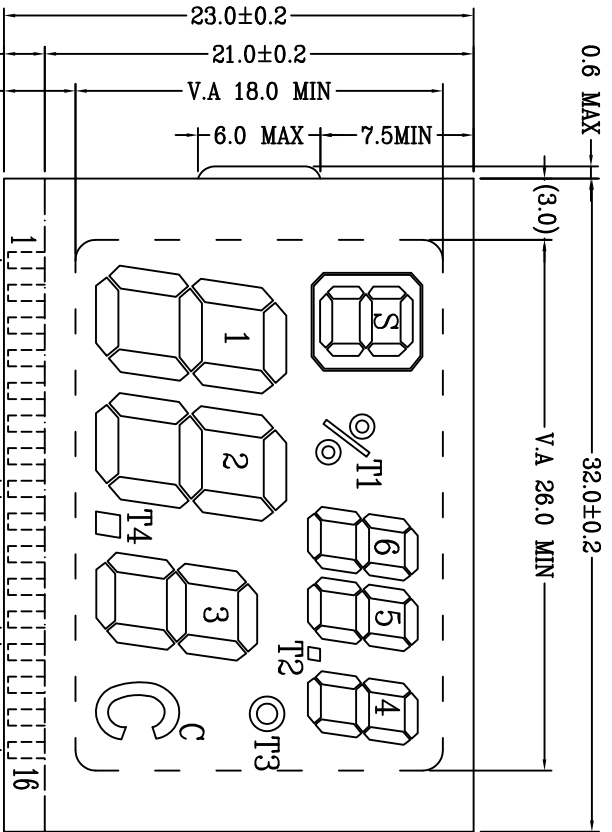


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM1	1F	1A	2F	2A	3F	3A	4F	4A	5F	5A	6F	6A	COM1			
COM2	1G	1B	2G	2B	3G	3B	4G	4B	5G	5B	6G	6B	COM2			
COM3	1E	1C	2E	2C	3E	3C	4E	4C	5E	5C	6E	6C		COM3		
COM4	S	1D	T1	2D	T2	3D	T3	4D	T4	5D	C	6D				COM4

- NOTES:
1. Display type: TN
 2. Viewing direction: 12 O'CLOCK
 3. Drive method: 1/4DUTY 1/2BIAS
 4. Polarizer mode: Transflective/Positive
 5. LCD drive voltage: 3.0 V
 6. Operation temperature: 0° C T0 + 60° C
 7. Storage temperature: -10° C T0 + 60° C
 8. Driver/Controller IC:
 9. CONNECTOR: ZEBRA

General Tolerance ±				VERSION		DATE	PART NAME:
mm	1	2	3	4	A	2011.12.28	EL00452TS2
0~10	0.05	0.1	0.1	0.2	SCALE	NO.	TITLE:
10~30	0.05	0.1	0.1	0.2	APPROVED	1/3	OUTLINE
30~100	0.1	0.2	0.3	0.5	CHECKED	DRAWN	FILE NAME:
100~300	0.1	0.2	0.5	0.8		王尧阳	WXY/E/KFWJ

1	2	3	4	5	6
			REVISION RECORD		APPROVED
			First Issue		

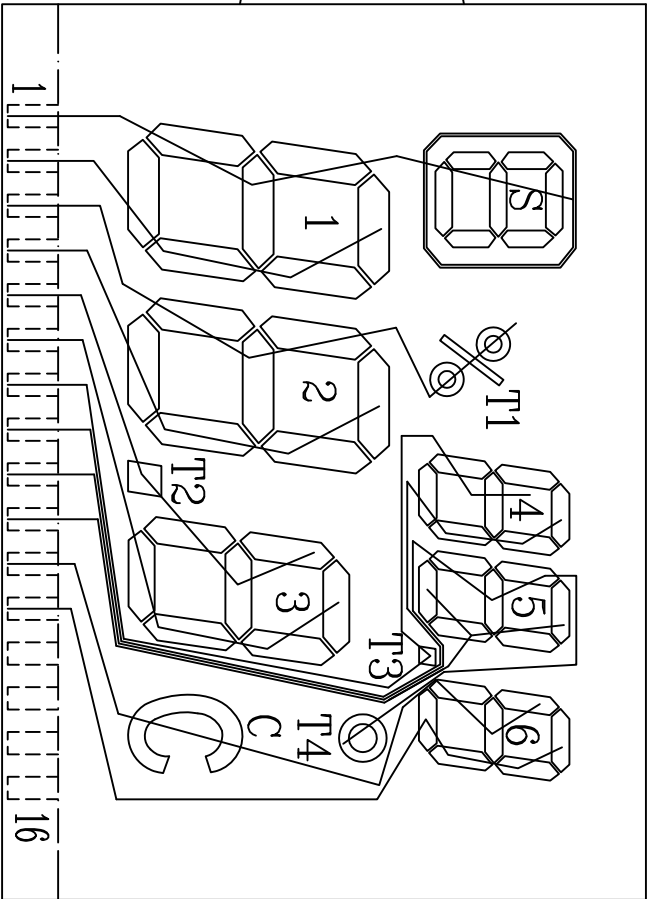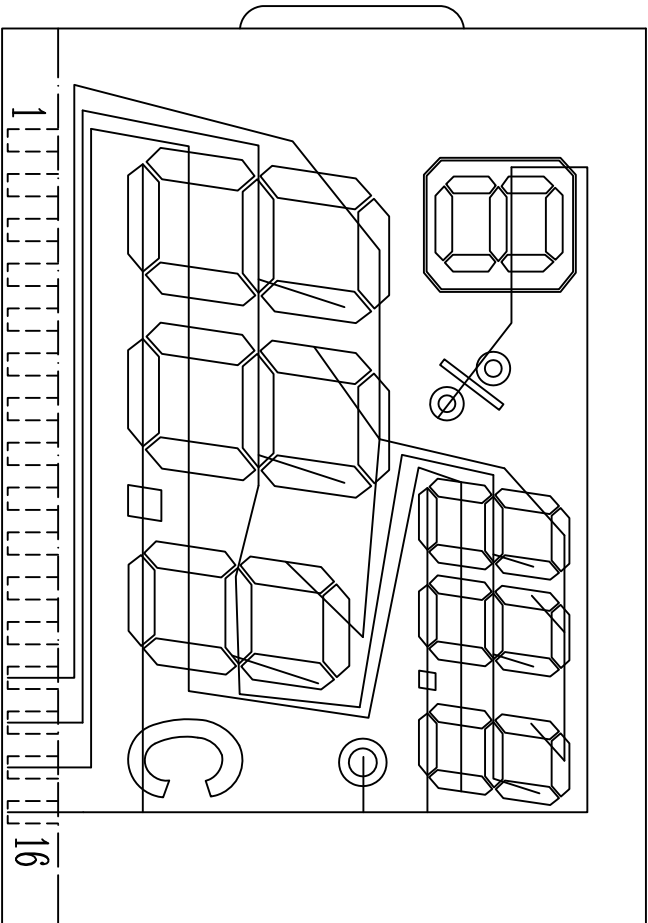

COM LINE

SEG LINE

General Tolerance ±				VERSION	DATE	PART NAME:
NO.	1	2	3			
1-3	0.05	0.1	0.1	A	2011.12.28	EL00452TS2
4-10	0.05	0.1	0.1	NO.	UNIT	TITLE:
11-30	0.05	0.1	0.2		mm	OUTLINE
31-100	0.1	0.2	0.3	APPROVED	2/3	DRAWN
101-300	0.1	0.2	0.5	CHECKED		FILE NAME:
301-500	0.1	0.2	0.5		王晓阳	WXY/E/KFWJ
501-1000	0.1	0.2	0.8			

REV	REVISION RECORD	APPROVED
△A	First Issue	

1

2

3

4

5

6

A

B

C


D

A

B

C

D

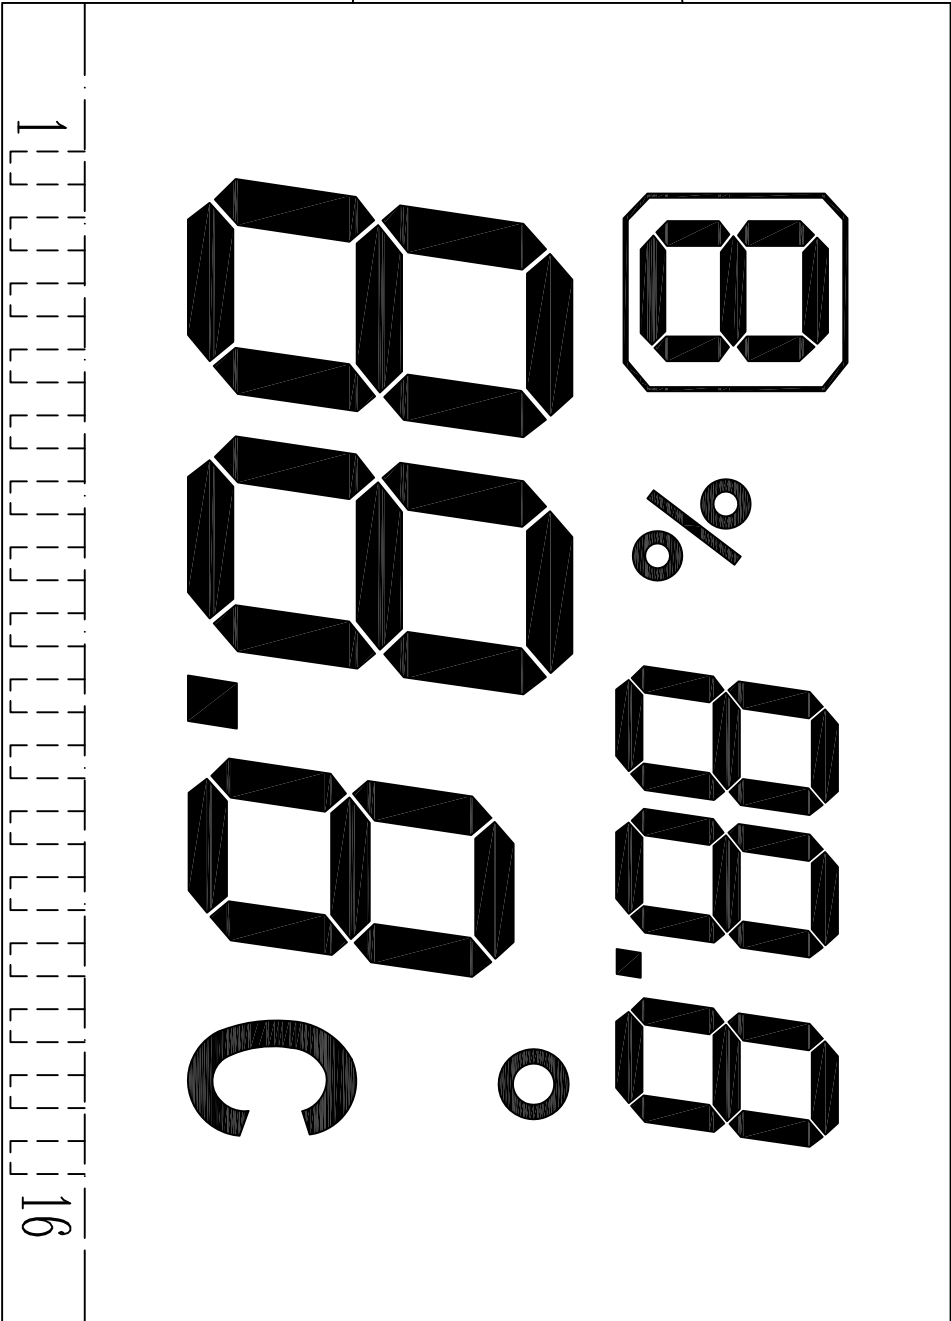

DISPLAY EFFECT

General Tolerance ±						VERSION	DATE	PART NAME:
mm	1	2	3	4				
0.1~0.25	0.05	0.1	0.1	0.2	SCALE	A	2011.12.28	EL00452TS2
0.25~0.5	0.05	0.1	0.1	0.2				
0.5~1.0	0.05	0.1	0.2	0.3	3/3	NO.	UNIT	OUTLINE
1.0~10	0.1	0.2	0.3	0.5				
10~100	0.1	0.2	0.3	0.5	APPROVED	mm	DRAWN	WXY/E/KFWJ
100~1000	0.1	0.2	0.5	0.8				
1000~10000	0.1	0.2	0.5	0.8	CHECKED	FILE NAME:		
10000~100000	0.1	0.2	0.5	0.8				