
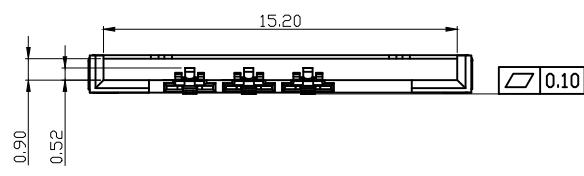
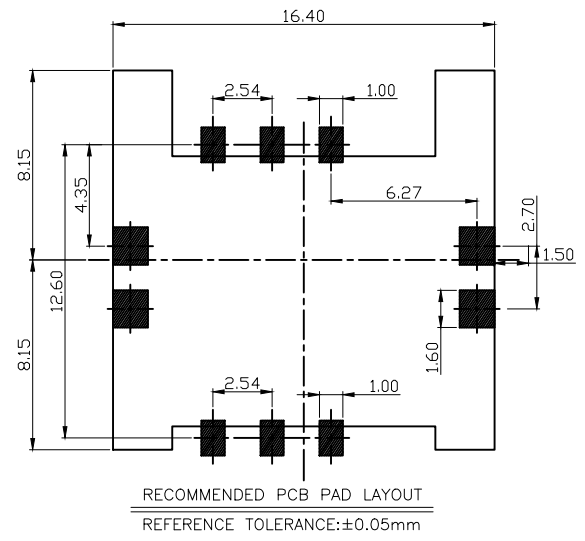
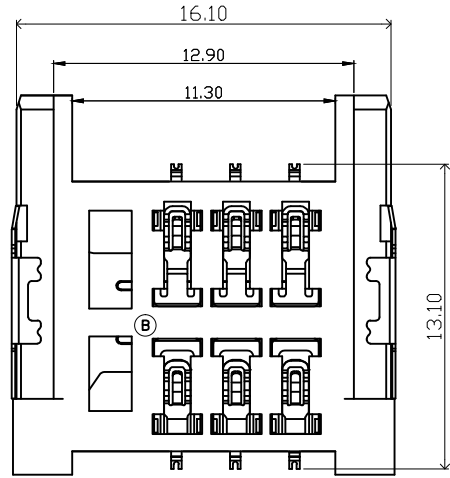


REV.	DATE	ECN.NO	MODIFY.CONTENT	APPROVER
A	2017.06.21	/	初版发行	Jason
B	2019.12.09	RD00319120901	结构优化	Jason

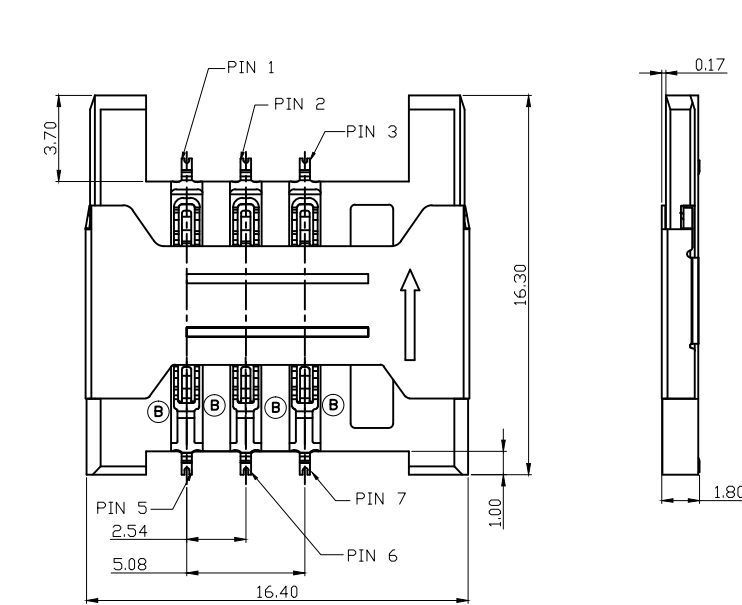

Specifications:
Material:
 1.Housing: Thermoplastics ,UL94V-0
 2.Contact: Copper Alloy, Gold plated in contact area;
 Matte Tin plating in Welding area; Nickel plated overall.
 3.Shell: SUS
 4.Lead free and ROHS compliant product.

Electrical:
 1.Current Rating: 1.0A
 2.Voltage Rating: 12 V AC
 3.Contact Resistance: 50 mΩ MAX
 4.Dielectric Withstanding Voltage: 250V AC for one minute
 5.Insulation Resistance: 1000 MΩ MIN

Environment characteristics:
 1.Operating Temperature: -40°C~+85°C

Mechanical:
 3.Durability : 5000 Cycles

PIN NO.	PIN NAME
PIN 1	Supply Voltage Vcc
PIN 2	Resrt(RST)
PIN 3	Clock (CLK)
PIN 5	Ground
PIN 6	Programming Voltage Vpp
PIN 7	I/O
PIN 4/8	N/A

GENERAL TOLERANCE		UNITS	NAME(INTENDED USE)	深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
SELECT	✓	mm	SIM CARD	
ON.	TOL	MAT'L	PART NO.(INTENDED USE)	TITLE: CUSTOMER DRAWING FOR
X.XXX	1 2 3	FINISH	SI06C-12201	SIM CARD 2.54mm 6P H=1.8mm 带 缸
X.XX	±0.10 ±0.05 ±0.15	Q'TY	APPD: Jason	DWG NO.: ATOM-A04441
X.X	±0.25 ±0.13 ±0.25		CHKD: able	
X.	±0.38 ±0.25 ±0.50		DR: Piao	
ANGLE	±5'			

SCALE	SHEET	REV.
1:1	1/1	B