

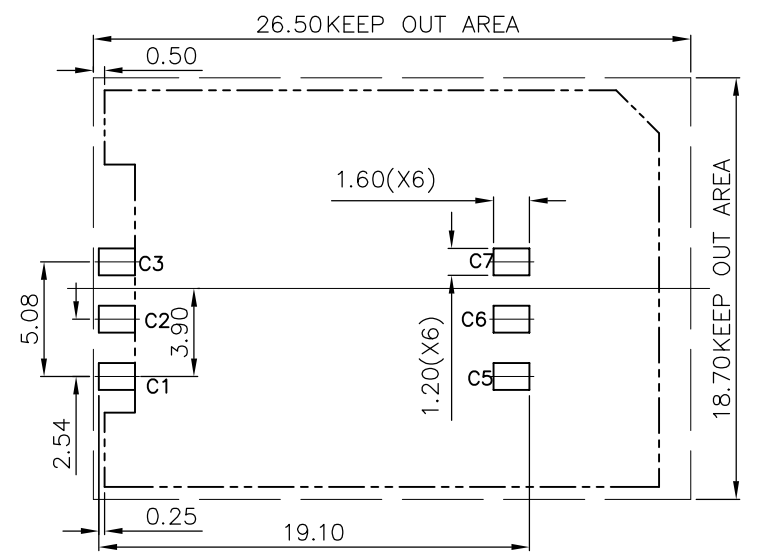
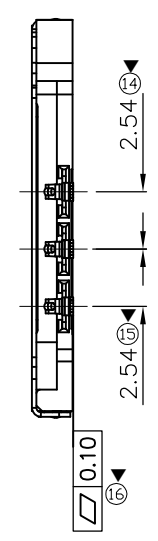


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
AO	2020.03.22		NEW
			APPROVER
			Abel


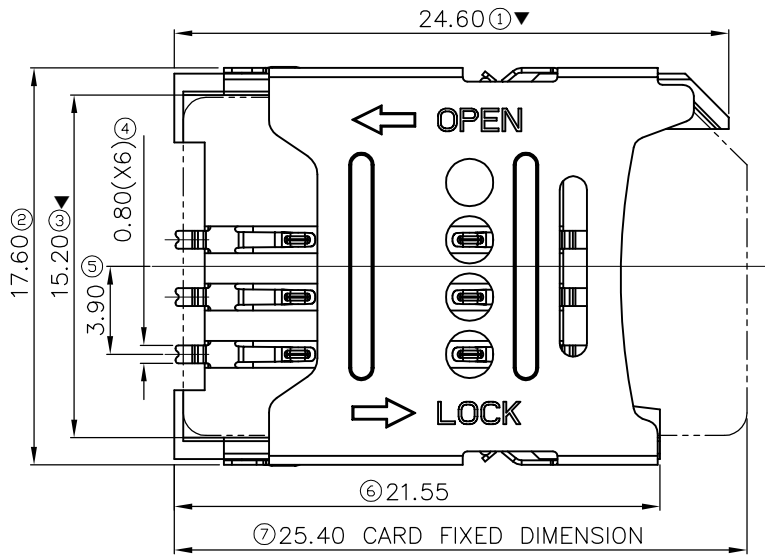


RECOMMENDED P.C. BOARD LAYOUT (TOP VIEW)
TOLERANCES UNLESS OTHERWISE SPEC. ±0.05

- Note:
- Material:
 - Housing: LCP, UL94V-0, Black;
 - Contact: C5210, Au 1U" plated on the contact area, Matte tin 100U" plated on the solder area, Ni 50U" under plated
 - Shell: SUS201, NO PLATED
 - Electrical:
 - Current Rating: 0.5A
 - Voltage Rating: 100V
 - Contact Resistance: 50mΩ Max
 - Dielectric withstanding voltage: 350V AC
 - Insulation Resistance: 1000MΩ Min
 - Mechanical characteristics:
 - Durability: 3000 cycles
 - Environment characteristics:
 - Operating Temperature: -25~+85°C
- Major Dimension: ▽
Products meet RoHS environmental requirements

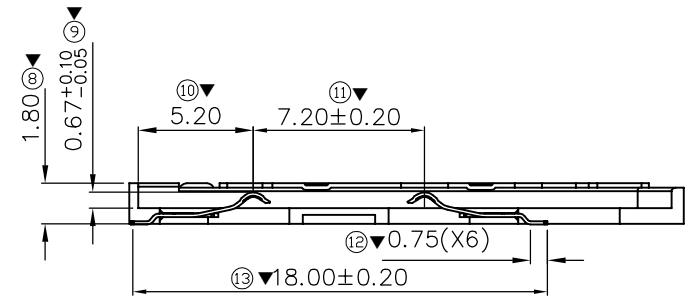

C1	C1:VCC
C2	C2:RST
C3	C3:CLK
C4	C4:RESERVED
C5	C5:GND
C6	C6:VPP
C7	C7:I/O
C8	C8:RESERVED

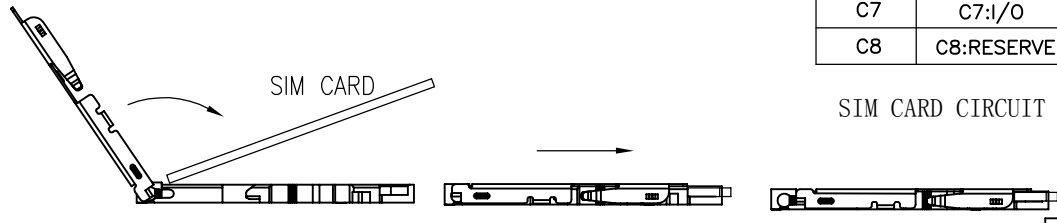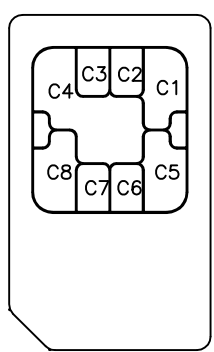

GENERAL TOLERANCE			UNITS mm	NAME (INTENDED USE) 卡座	ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
SELECT	TOL.	✓			
ON.	1	2	3	PART NO. (INTENDED USE) SI132C-03200	TITLE: Customer Drawing For SIM CARD 2.54mm 6P H=1.8mm 掀盖式
X.XXX	±0.10	±0.15	±0.20		
X.XX	±0.15	±0.20	±0.25	APPD: Abel	DWG NO.: ATOM-A09037
X.X	±0.20	±0.25	±0.30		
X.	±0.25	±0.30	±0.50	CHKD: Vicky	SCALE SHEET REV. 1:1 1/1 AO
ANGLE	±2'				
			FINISH	DR: CHENG	
			Q'TY		