

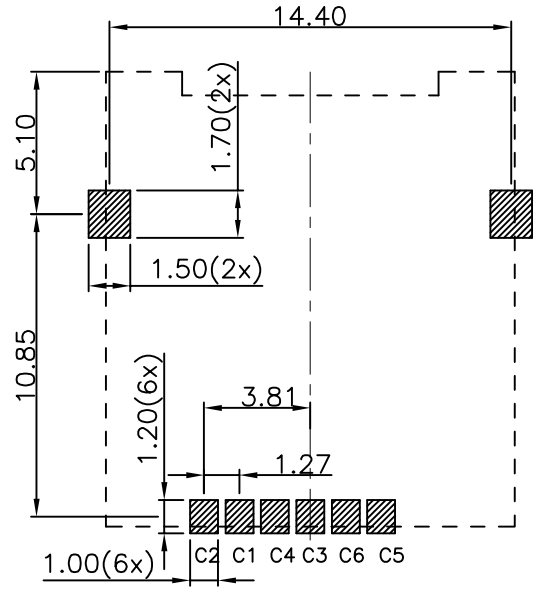
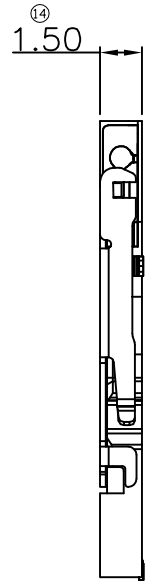
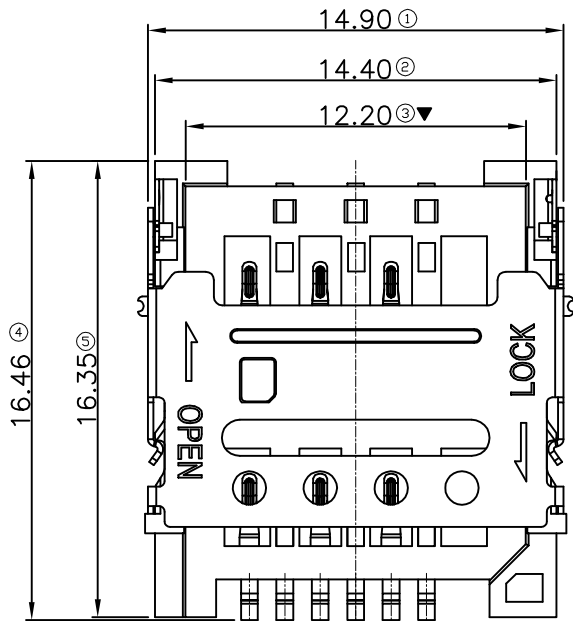


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A0	2020.03.22		NEW	Abel

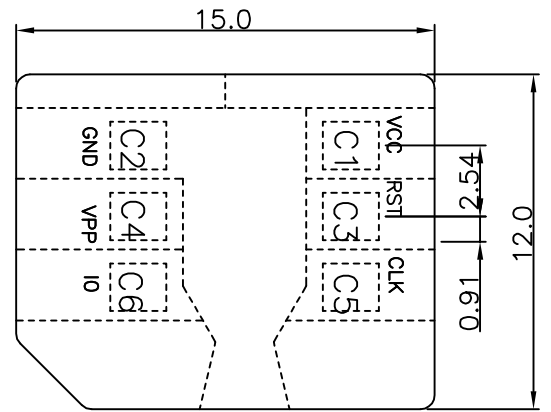


RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

- Note:
- Material:
    - Housing: LCP,UL94V-0 Color:Black
    - Contact:C5210
    - Shell:SUS201
  - Plating
    - Contact:1U"Min Gold plating at contact area
    - G/F plating at solder area
    - PEG:G/F plating at solder area
  - Electrical:
    - Current Rating:1.0A
    - Voltage Rating:12V
    - Contact Resistance:100mΩ Max
    - Dielectric withstanding voltage:500V AC
    - Insulation Resistance:1000MΩ Min(Unmated)  
100MΩ Min(Mated)
  - Environment characteristics:
    - Operating Temperature:-25~+70℃
- Major Dimension:▼  
Products meet RoHS environmental requirements

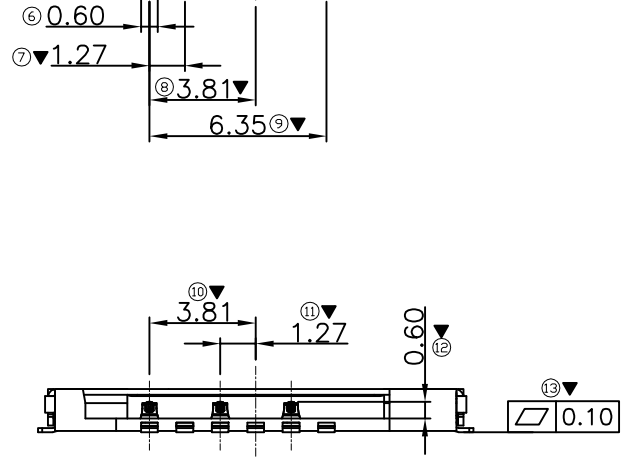

MICRO SIM

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE) 卡座	 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.
SELECT		✓			
TOL.			FINISH	DWG NO.: ATOM-A09133	
ON.	1	2			3
X.XXX	±0.10	±0.15	±0.20	SCALE: 1:1 SHEET: 1/1 REV: A0	
X.XX	±0.15	±0.20	±0.25		
X.X	±0.20	±0.25	±0.30		
X.	±0.25	±0.30	±0.50		
ANGLE	±2'				