
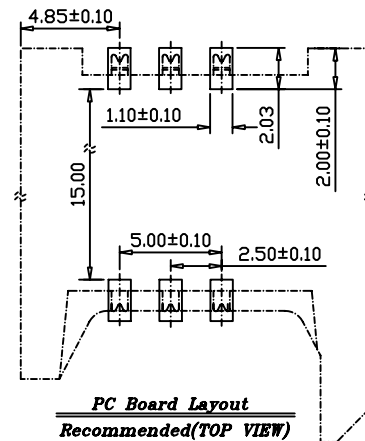
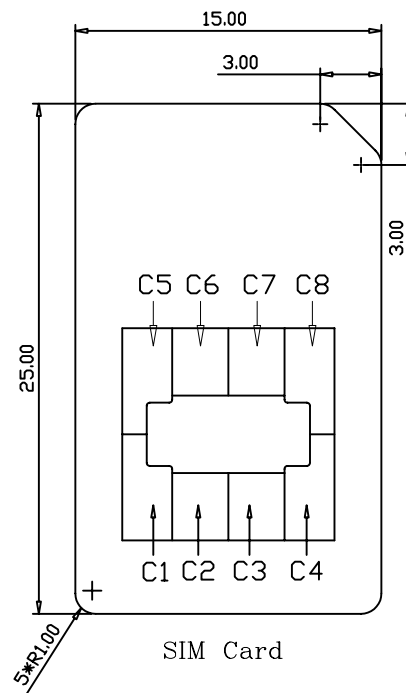
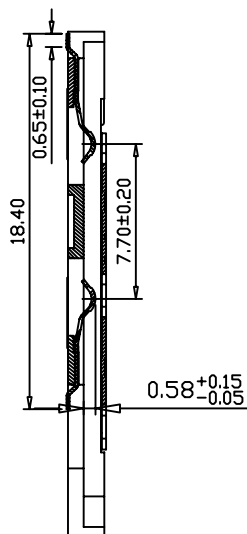



REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2015/12/16	/	NEW	Vicky

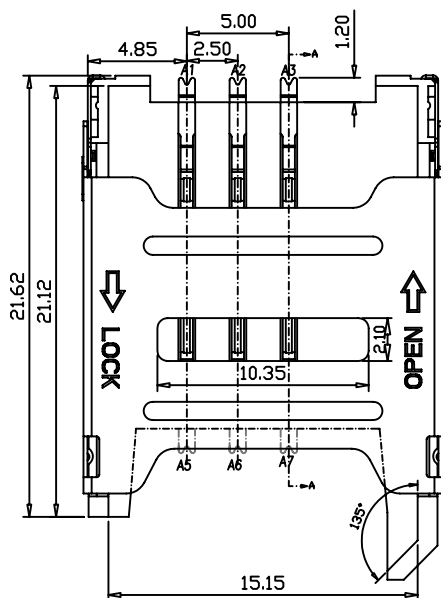

PIN NO.	PIN NAME
A1	VCC
A2	RST
A3	CLK
A4	Reserved
A5	GND
A6	VPP
A7	I/O
A8	Reserved

NOTES:

- SPECIFICATIONS
 INSULATION RESISTANCE: 100M min. AT DC 250V DC
 WITHSTANDING VOLTAGE: 100V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100m Ohm max. AT 10MA/20mV max
 CURRENT RATING: 1 A
 VOLTAGE RATING: 250 Volts AC(rms.) Max
 OPERATING TEMP. RANGE: -55°C~+105°C
 MATING CYCLES: 5000 INSERTIONS
- MATERIAL:
 Housing: LCP, UL 94V-0, COLOR"BLACK"
 TERMINAL: COPPER ALLOY (C5210)
 SHELL: STAINLESS STEEL (SUS)
 LATCH: STAINLESS STEEL (SUS)
- FINISH:
 TERMINAL: 50u" min NICKEL UNDERPLATED ON ALLOVER, GOLD
 PLATING ON CONTACT ARER, Sn ON SOLDER TAIL.

GENERAL TOLERANCE			UNITS mm	NAME: SIM CARD	深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
SELECT	✓			MAT'L	
ON.	TOL.	1 2 3	FINISH	APPD: Vicky	DWG NO. ATOM-A02894
X.XXX	±0.05	±0.05 ±0.15		Q'TY	
X.XX	±0.15	±0.13 ±0.25	ANGLE	DR: Cmy	SCALE SHEET REV 1:1 1/1 A
X.X	±0.25	±0.25 ±0.50		±1°	