
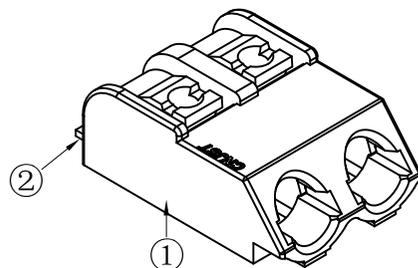






RoHS Compliant

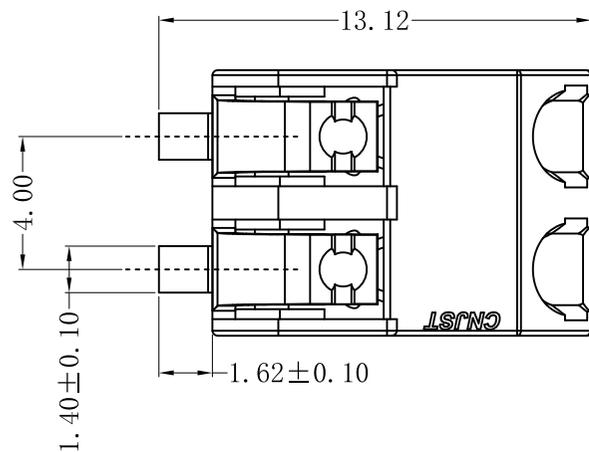

SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 300 V AC DC
- 4 Rated current: 6.0 A AC DC
- 5 Withstand Voltage: 1600V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$
- 7 Recommended to use Solid wire AWG#24~18 ( $0.2 \sim 0.75mm^2$ )

ORDER INFORMATION:

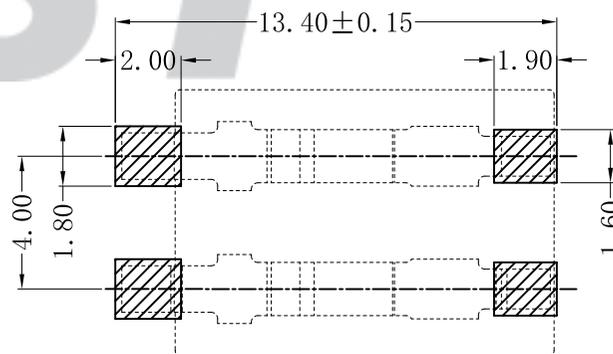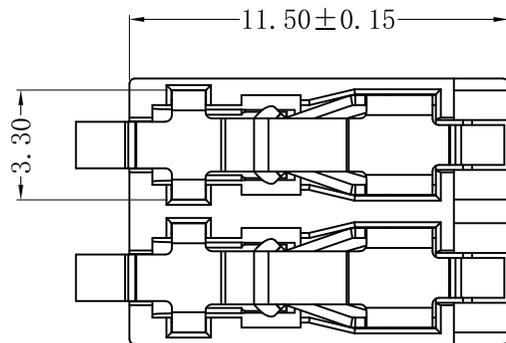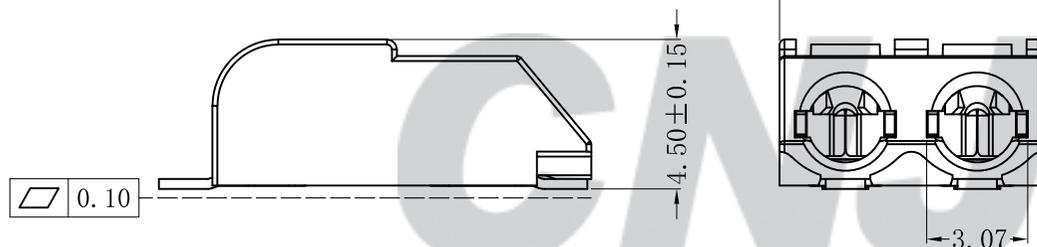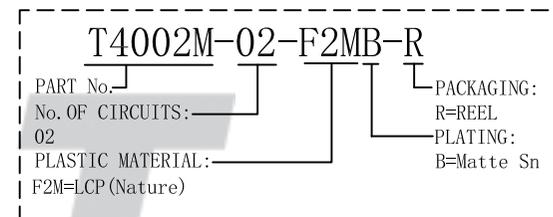

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/1	2024.01.31	增加LOGO	王丽君	②	Contacts	2	Phosphor Bronze	Matte-Sn
C/0	2022.12.09	统一标准 更新模版	黄羨程	①	Insulator	1	LCP(UL94V-0)	Nature

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	<b>CNJST 捷仕泰企业</b>		Drawn: 王丽君 2024.01.31
	Model No.: T4002M-02-F2MB-R		Checked: 吴丹平
	Model Name: 4.00mm PITCH 90° WAFER		Approved: 林旭芝
UNIT: mm		SCALE: FULL	REVISION: C/1
			DWG NO.: CNJST/GCCP-0492