
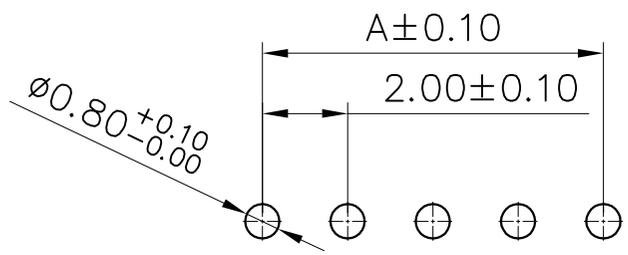
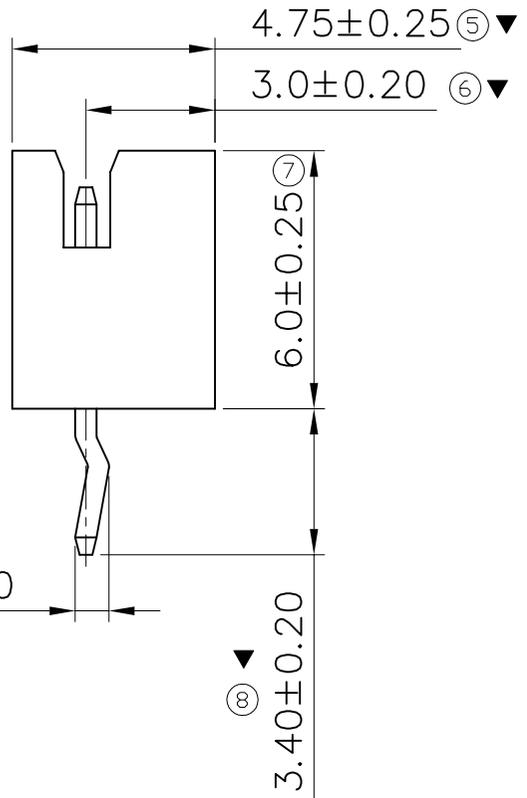
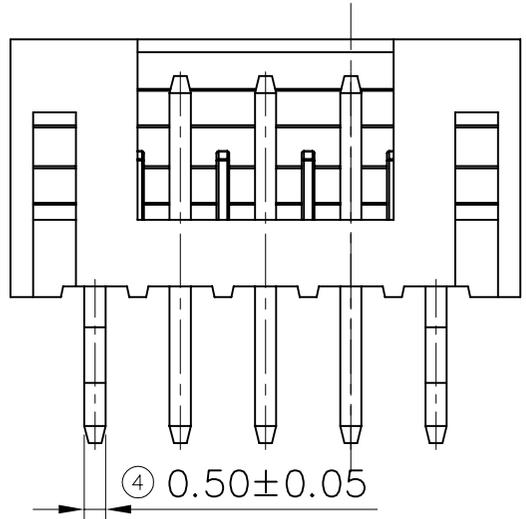


5		6		7		8	
REV.	DATE	ECN NO.	MODIFICATION		APPROVER		
A0	2020.12.21	/	NEW		Jason		

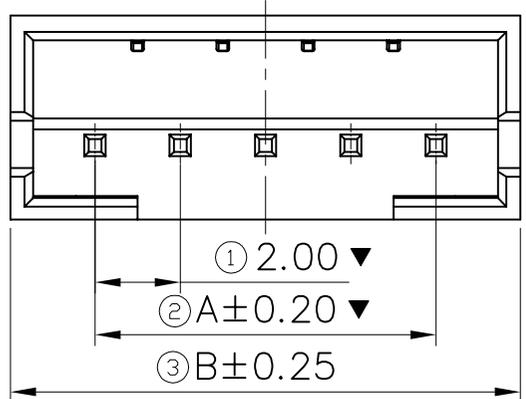

RECOMMENDED PCB LAYOUT  
TOLERANCE:±0.05

Specifications:  
Material:  
1.Housing: PA66, 白色/米色 UL94V-0  
2.Contact: Copper Alloy. Tin plated over Nickel .  
Electrical:  
1.Current Rating: 2.0A  
2.Voltage Rating: 200V  
3.Contact Resistance: 20mΩ MAX  
4.Dielectric Withstanding Voltage: 500V AC  
5.Insulation Resistance: 1000MΩ MIN  
Environment characteristics:  
1.Operating Temperature: -25°C~+85°C  
Major Dimension:▼  
Lead free and ROHS compliant product.

CKT	A	B	CKT	A	B
2	2.0	6.0	12	22.0	26.0
3	4.0	8.0	13	24.0	28.0
4	6.0	10.0	14	26.0	30.0
5	8.0	12.0	15	28.0	32.0
6	10.0	14.0	16	30.0	34.0
7	12.0	16.0	17	32.0	36.0
8	14.0	18.0	18	34.0	38.0
9	16.0	20.0	19	36.0	40.0
10	18.0	22.0	20	38.0	42.0
11	20.0	24.0			

GENERAL TOLERANCE			UNITS	NAME(INTENDED USE)	
SELECT	✓		mm		WF
TOL.	1	2		PART NO.(INTENDED USE)	
ON.	X.XXX	±0.10	±0.15	±0.20	WF200**-11***
	X.XX	±0.15	±0.20	±0.25	APPD: Abel
	X.X	±0.20	±0.25	±0.30	CHKD: vicky
	X.	±0.25	±0.30	±0.50	DR: CHENG
ANGLE	±2'				

FINISH		Q'TY

**ATOM**® 深圳市爱特姆科技有限公司  
SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE: Customer Drawing For Wafer 2.0mm XP DIP 180°两边打K脚

DWG NO.: ATOM-A07582

SCALE	SHEET	REV.
1:1	1/1	A0