
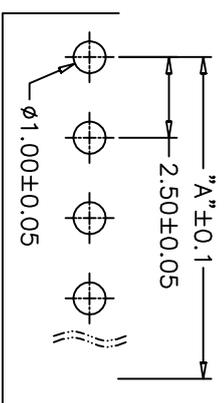
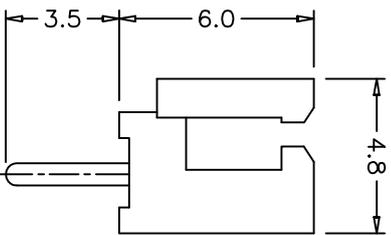
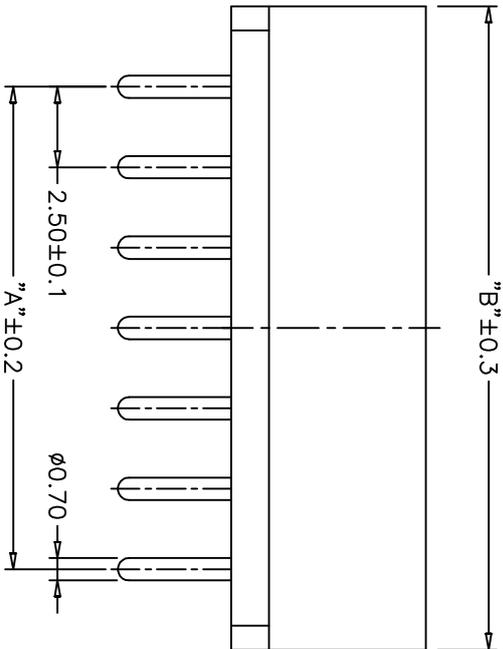


5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
A	2012/12/12	/	NEW
			APPROVER
			Vicky

SPECIFICATIONS

Applicable Wire: AWG#28~#22
 Rated voltage: 250V DC/AC(rms)
 Rated Current: 3A (AWG #22)
 Withstand voltage: 1000V AC/min.
 Working Temp : -40°C ~ +105°C
 Insulation resistance: $\geq 1000 M\Omega$
 Contact resistance: $\leq 20 m\Omega$

MATERIAL
 Insulator: PA66, UL94-V2
 Contact PIN: Brass

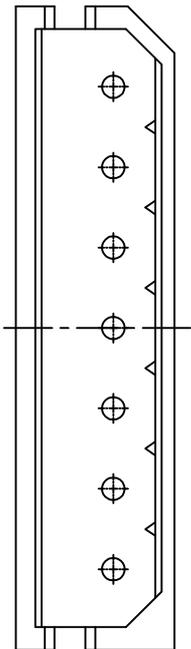

P.C.B. LAYOUT

PIN NO.	A	B
1	2.5	7.4
2	5.0	9.9
3	7.5	12.4
4	10.0	14.9
5	12.5	17.4
6	15.0	19.9
7	17.5	22.4
8	20.0	24.9
9	22.5	27.4
10	25.0	29.9
11	27.5	32.4
12	30.0	34.9
13	32.5	37.4
14	35.0	39.9

GENERAL TOLERANCE		UNITS	mm	NAME:	WF	ATOM 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.	TITLE:	Wafer2.5mm XP DIP 180° 圆针	
SELECT	✓			PART NO:	WF250**-07***		DWG NO.	ATOM-A00778	
TOL	1	2	3	FINISH	Q'Ty	SCALE	SHEET	REV	
ON	1	2	3	APPD:	Vicky	1:1	1/1	A	
X.XXX	±0.08	±0.15		CHKD:	Emilia				
X.XX	±0.15	±0.13	±0.25	DR:	Iris				
X.X	±0.25	±0.25	±0.50						
X.	±0.30	±0.38	±1.00						
ANGLE	±2°								

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8