

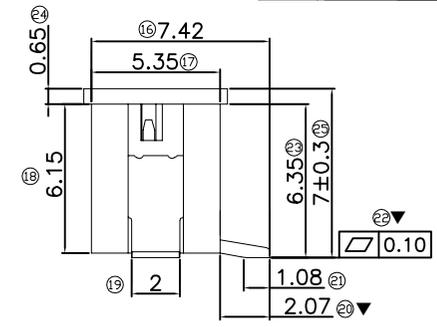
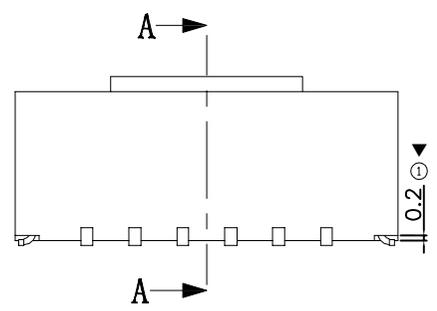


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A0	2018.10.18	/	NEW	Jason
A1	2024.03.15	RD00324031501	修正图纸端子/焊片材质	Abel



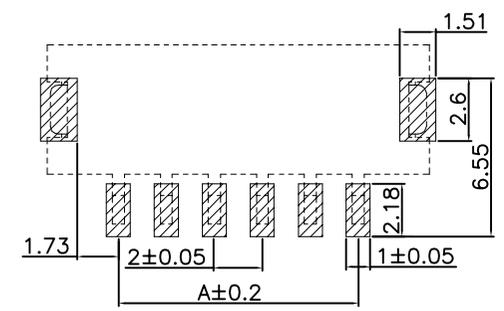


Specifications:  
Material:  
1.Housing: LCP Natural ,UL94V-0  
2.Contact: H62,Plating bright tin 110-130u" over Nickel 20-60u" plated  
3.Solder tab: H62,bright tin 110-130u" over Nickel 20-60u" plated  
Electrical:  
1.Current Rating: 2A AC,DC  
2.Voltage Rating:250V  
3.Contact Resistance: 20mΩ MAX  
4.Dielectric Withstanding Voltage: 1000V AC/minute  
5.Insulation Resistance: 1000MΩ MIN  
Environment characteristics:  
1.Operating Temperature:-25°C~+85°C  
Major Dimension:▼  
Lead free and ROHS compliant product.

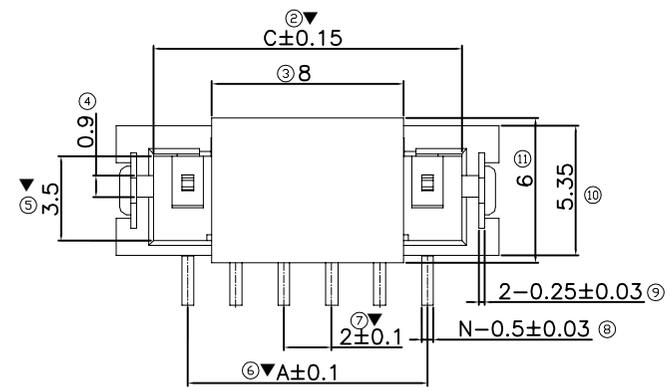

RECOMMENDED PCB LAYOUT  
TOLERANCE:±0.05

PIN NO	Dimensions (mm)		
	A	B	C
2PIN	2.0	7.90	4.85
3PIN	4.0	9.90	6.85
4PIN	6.0	11.90	8.85
5PIN	8.0	13.90	10.85
6PIN	10.0	15.90	12.85
7PIN	12.0	17.90	14.85
8PIN	14.0	19.90	16.85
9PIN	16.0	21.90	18.85
10PIN	18.0	23.90	20.85
11PIN	20.0	25.90	22.85
12PIN	22.0	28.00	24.85
13PIN	24.0	29.90	26.85
14PIN	26.0	31.90	28.85
15PIN	28.0	33.90	30.85
16PIN	30.0	35.90	32.85

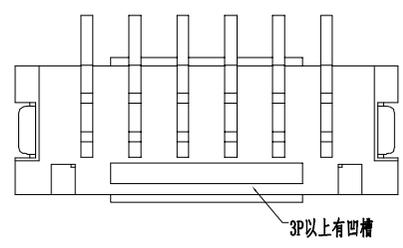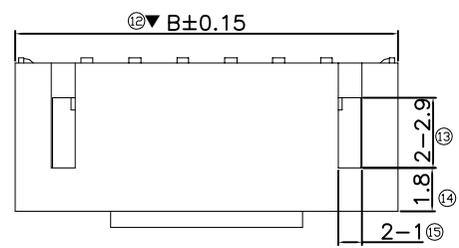

GENERAL TOLERANCE				UNITS	NAME (INTENDED USE)
SELECT				mm	
ON.	1	2	3	MAT'L	WF
X.XXX	±0.10	±0.15	±0.20	FINISH	PART NO. (INTENDED USE)
X.XX	±0.15	±0.20	±0.25		WF200**-02***
X.X	±0.20	±0.25	±0.30	Q'TY	APPD:
X.	±0.25	±0.30	±0.50		Abel
ANGLE	±2'				CHKD:
					Vicky
					DR:
					CHENG

NAME (INTENDED USE)	WF
PART NO. (INTENDED USE)	WF200**-02***
APPD:	Abel
CHKD:	Vicky
DR:	CHENG

**ATOM** 深圳市爱特姆科技有限公司  
SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE: Customer Drawing For Wafer 2.0mm XP SMT  
立贴 带夹持盖

DWG NO.: ATOM-A07533

SCALE	SHEET	REV.
1:1	1/1	A1